


# Interior Size Chart SL45: STC 30 to STC 34

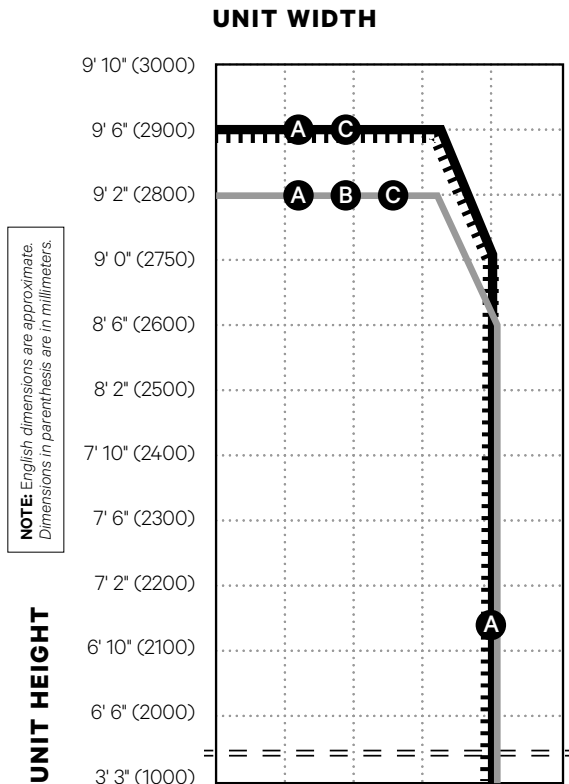

NOTE: English dimensions are approximate. Dimensions in parenthesis are in millimeters.

Number of Panels in Unit	Frame Width of Unit				
	1' 11" (600)	2' 3" (700)	2' 7" (800)	2' 11" (900)	3' 3" (1000)
2	3' 11" (1200)	4' 7" (1400)	5' 3" (1600)	5' 10" (1800)	6' 6" (2000)
3	5' 10" (1800)	6' 10" (2100)	7' 10" (2400)	8' 10" (2700)	9' 10" (3000)
4	7' 10" (2400)	9' 2" (2800)	10' 6" (3200)	11' 9" (3600)	13' 1" (4000)
5	9' 10" (3000)	11' 5" (3500)	13' 1" (4000)	14' 9" (4500)	16' 4" (5000)
6	11' 9" (3600)	13' 10" (4200)	15' 8" (4800)	17' 8" (5400)	19' 8" (6000)
7	13' 10" (4200)	16' 0" (4900)	18' 4" (5600)	20' 7" (6300)	22' 10" (7000)
8	15' 8" (4800)	18' 4" (5600)	20' 11" (6400)	23' 6" (7200)	26' 1" (8000)
9	17' 9" (5400)	20' 7" (6300)	23' 6" (7200)	26' 5" (8100)	29' 4" (9000)
10	19' 8" (6000)	22' 10" (7000)	26' 1" (8000)	29' 4" (9000)	32' 9" (10000)
11	21' 7" (6600)	25' 1" (7700)	28' 8" (8800)	32' 5" (9900)	36' 1" (11000)
12	23' 6" (7200)	27' 4" (8400)	31' 5" (9600)	35' 5" (10800)	39' 4" (12000)

Frame Width of Unit  
(Wider widths possible with addition of Panel Sets.)

## MAXIMUM UNIT HEIGHT

||||||| For STC 30 - 34 (max. 3 lbs/ft<sup>2</sup> [15 kg/m<sup>2</sup>])

### A CONFIGURATIONS

(Swing panel at jamb only.)

#### Standard Configurations:

1L	1L 1R	1L 4R	2L 1R	4L 1R	6L 1R
1R	1L 2R	1L 6R			

#### Sample Configurations with Unhinged TwoFold or FourFold Panel Sets:

1L 2L/R | 1L 4L/R 1R | 4L/R 1R

Addition of Panel Sets to all A Configurations possible.

————— For STC 30 - 34 (max. 3 lbs/ft<sup>2</sup> [15 kg/m<sup>2</sup>])

### B CONFIGURATIONS

(Swing panel as part of odd number of panels.)

#### Standard Configurations:

1L 3R	2L 3R	3L 1R	3L 4R	4L 3R	5L 1R	5L 4R	6L 3R
1L 5R	2L 5R	3L 2R	3L 5R	4L 5R	5L 2R	5L 5R	6L 5R
		3L 3R	3L 6R		5L 3R	5L 6R	

#### Sample Configurations with Unhinged TwoFold or FourFold Panel Sets:

3L 2L/R | 3L 4L/R | 3L 4L/R 3R

Addition of Panel Sets to all B Configurations possible.

————— For STC 30 - 34 (max. 3 lbs/ft<sup>2</sup> [15 kg/m<sup>2</sup>])

### C CONFIGURATIONS

(No swing panels.)

#### Standard Configurations:

2L	4L	6L	2L 2R	4L 2R	6L 2R
2R	4R	6R	2L 4R	4L 4R	6L 4R
			2L 6R	4L 6R	6L 6R

#### Sample Configurations with Unhinged TwoFold or FourFold Panel Sets:

2L 2L/R | 4L/R 4R | 6L 4L/R | 4L/R 4L/R | 2L/R 4L/R

Addition of Panel Sets to all C Configurations possible.

## GLAZING

- Different glass thicknesses from 3/16" (4 mm) to 5/16" (8 mm)
- Dry glazing system

## NOTES

- Max. panel width swing panel attached to side jamb 3' 3" (1000 mm).
- Min. panel width 23 5/8" (600 mm) for C Configurations.
- Min. panel width 21 5/8" (550 mm) for Panel Sets 2L/R, 4L/R.
- For special sizes and configurations ask NanaWall.