

# Architectural Binder Section NW Aluminum 840

GENERATION ™

Folding Glass Walls by NanaWall

## NW Aluminum 840—Generation 4 Folding Glass Wall by NanaWall

The innovative NW Aluminum 840 provides the slimmest and most thermally efficient aluminum frame of the Generation 4 Folding Glass Walls by NanaWall product line. With a frame profile styled in a crisp, angular design, the intersection of two folding panels is a mere 3 7/8" (99 mm). Comprised of a host of proprietary and patented features, this floor supported system offers an extremely streamlined appearance with minimal exposed hardware, creating a new level of aesthetics.

NW Aluminum 840 offers the largest panel sizes available across the Generation 4 product family. With floor supported panels capable of reaching system heights up to 11' 6" (3500 mm) and panel widths up to 3' 7" (1100 mm), this folding glass wall offers the possibility of wider opening sizes with the integration of FourFold and SixFold Panel Sets that move and stack to either side of the opening. NW Aluminum 840 provides the ultimate in layout flexibility. As a custom-built architectural solution, this system is available in inswing or outswing configurations and can accommodate open corner designs.

As a NanaWall product, the NW Aluminum 840 has been put through rigorous independent testing for air, water, structural, operation, and forced entry. This fourth generation system is designed from the ground up and, as a result, is our most energy-efficient aluminum framed folding glass wall.

### Minimal Sightline for a Modern Aesthetic

Panel frames are slim and contemporary with a total 3 7/8" (99 mm) junction where the two adjacent folding vertical stiles meet. The panel profiles offer a crisp, angular design. Top and bottom rails are a minimal 2 5/8" (67 mm), providing slim-line aesthetics. Panel depth is 3 5/16" (84 mm). To coordinate with design programs, simulated divided lites, horizontal and vertical mullions are possible.

### Patented Multifunctional Thermal Break Affords Slim Sightline and Outstanding Energy Efficiency

The Bionic Turtle® is a patented (Patent No. US10550625B2) polyamide single piece insulbar design that serves many functions. Not only does it provide an outstanding insulating thermal break within the frame profiles for energy efficiency, but it also serves as a concealed channel to house the system's locking rods. By being able to combine functions within one element, the Bionic Turtle design allows the slim profile appearance of NW Aluminum 840.

### Unique Gothic Arch Roller Design Provides Frictionless Smooth Operation

NW Aluminum 840 is engineered for ease of use. Hinged panels are intuitive and convenient to operate allowing for the effortless opening and closing of the system on demand. The bottom rollers run on two stainless steel wheels with a unique Gothic arch design supported by a double row of encapsulated and self-lubricating ball bearings. With a 2-point contact of each wheel to the floor track, the system glides quietly and smoothly with less friction by providing an equal distribution of weight on the stainless steel track.

The rollers run above the water table, visible during operation and concealed between the panel profiles when the system is closed. This proprietary design allows for continued long-term smooth operation and has been (internally) tested to 20,000 opening and closing cycles in accordance with DIN/EN 1191.

### Floating Left/Right FourFold or SixFold Panel Sets for Wider Openings and Flexible Stacking Placement

NW Aluminum 840, along with Generation 4 Folding Glass Walls by NanaWall product family, is the only floor supported, thermally broken folding system available that allows for larger opening sizes and flexible space management with the integration of FourFold or SixFold Panel Sets. These panel sets are able to move and stack either to the right, left, or center within the same track allowing the panels to be stacked in the most convenient location as needed. Additionally, the panels may be partially opened and located to control traffic flow or utilized to protect areas that are exposed to excessive wind.

### NW Aluminum 840 Floor Supported Technology Reduces Structural Requirements

Floor supported systems are ideal for applications where the load-bearing capability of the header is a concern.

The benefits of floor supported are:

#### Reduced Structural Requirements

- Control construction costs. NanaWall Floor Supported Technology requires less header load and limits the need for extensive pre-cambering.
- Improves the likelihood of keeping existing header when retrofitting/remodeling thus reduced construction costs—as long as the maximum deflection is the lesser of a 1/4" or L/720.

**Long-term Durability and Smooth Operation**

- Floor supported systems are durable and offer smooth operation with stainless steel wheels on a stainless steel track.

**Five Sill Options with High Heel Resistant Feature**

NW Aluminum 840 has five sill options: Hybrid, Low Profile Saddle, Low Profile Saddle with UniverSILL® (Patent No. US011174673B2), Low Profile Raised, and Flush. Standard to all sills is removable aluminum high heel resistant sill inserts. These inserts provide ADA compliance for the Low Profile Saddle and Flush sills and create a very barefoot-friendly transition. Furthermore, the inserts offer protection from dirt and debris collecting in the bottom track. A lighted option is possible; LED rope lights by others may be run under the sill insert to illuminate the way.

**Swing Doors for Traffic Management**

To accommodate traffic flow, swing panels can be added either to the end of a chain of panels for systems with an odd number of panels folding in one direction or hinged to the side jamb, depending on unit height and configuration. Please reference the NW Aluminum 840 size charts.

NW Aluminum 840 allows for up to 3' 3" (1000 mm) swing panel hinged to the side jamb. Swing panels have been tested and passed over 500,000 cycles and can be optionally outfitted with higher kickplates for ADA compliance. Top door closers by others is possible.

**Concealed Panel Alignment Means Less Exposed Panel Hinges**

The patented (Patent No. US10711510B2) TwinX mechanism aligns panels of over 7' (2150 mm) in height by adding a hidden spring-loaded structural reinforcement feature without the need for an additional exposed hinge in the middle of the system. TwinX interlocks the panels together when the system is closed providing a consistent seal between the panels, specifically engineered to meet higher wind loads. This unique feature provides a clean-lined, sleek, and uniform appearance to the system.

**Multipurpose Frame Insert Provides Continuous Surface at Side Jamb and Head Track**

Standard to the system is a black polyamide clip-on multipurpose frame insert conceals all visible frame to structure attachment points and screw heads creating a clean, even appearance. This frame cover piece creates a

hollow space to run and guide concealed cabling for the NW Aluminum 840 to connect to a home security system by others.

**System Width Adjustment Feature for Long-term Tight, Consistent Sealing**

System width adjusts with ease. To allow for construction tolerance, a patented (Patent No. US10683688B2) lateral adjustment feature of +/- 3/16" (5 mm) is available at the side jamb. This allows for consistent seal compression within the system and can be adjusted should the need arise. This adjustment feature is located so that it doesn't interfere with the continuous perimeter seal of the frame.

**Anti-tilt Feature For Dynamic Stacking of Panel Sets**

Each floor supported FourFold or SixFold Panel Set is outfitted with a proprietary engineered anti-tilt feature in the head track. This feature assures that the floating panels stack neatly and securely when in open formation. Panels may stack either to the right side, left side, or anywhere within the opening.

**Installation Mounting Plate for Optimal Load Transfer**

Stainless steel installation plates provide optimal load transfer reducing the number of screws required for mounting the system's frame. Each installation plate is backed with a sealing cushion to avoid bridging the thermal break and spreads the load of the screw head over a larger surface area resulting in fewer fixing points needed. These plates create a clean, finished look. Multipurpose inserts installed on the side jamb and head track cover these installation plates and provide a continuous surface.

**Optional Advanced Security Mechanism**

For applications requiring state-of-the-art security, an optional lock monitoring system with Reed contacts is available located within the head track. A special concealed locking mechanism end cap, in combination with the concealed Reed contact, creates an open or closed loop for the home security system supplied by others. This optional locking feature can be a concealed cable routed through the frames to a home security system. Additionally, the Reed contact can be connected to a service/maintenance system by others that counts the number of opening and closing cycles of the unit advising when it may be time to contact a service technician for routine maintenance.

### Concealed Locking for Clean Appearance

Standard to the system is concealed locking between folding panels that operates with a 180° turn of a flat handle. The top and bottom locking bolts have approximately a 1" (24 mm) throw for maximum security engagement into the head and floor track.

#### Standard and Tested Locking Option on Primary Swing Panels:

1. Multi-point locking operated by lever handles and with European profile cylinder. Locking is independently tested for air, water, structural load performance, and forced entry.

#### Non-standard Commercial Locking Options on Primary Swing Panels (no air, water, or structural load values for primary swing panel):

1. Deadbolt lock(s) and push/pull handles and key/key European profile cylinder on both sides. Only recommended for end swing panel with door closer by others.

#### Standard and Tested Locking Option for Secondary Swing Panels:

1. Concealed edge lock with top and bottom locking bolts have approximately a 1" (24 mm) throw for maximum security engagement into the head and floor track. Locking is independently tested for air, water, structural load performance, and forced entry.

For additional hardware options, contact NanaWall.

### Handles

#### Stainless Steel Lever Handles

Stainless steel lever handles and escutcheon plates are available either in brushed satin, black titanium, or anti-viral/anti-microbial copper-nickel finish.

#### Stainless Steel Flat Handles

Stainless steel flat handles are available either in brushed satin, black titanium, or anti-viral/anti-microbial copper-nickel finish.

#### Spring-Loaded Pull Handle

For outswing units with larger panel sizes, a spring-loaded pull handle is supplied for ease of closing the system.

The pull handle is located above the flat handle. When not in use, the handle lays flat against the adjacent panel and is supplied with bumpers to avoid metal-to-metal contact.

Handles are either silver or black titanium stainless steel with the attachment to coordinate with the hinge hardware of the system.

### System Sizes

Depending on the desired glazing of the unit, maximum panel sizes range. For double and triple glazed systems, units can reach heights of 11' 6" (3500 mm) and panel widths up to 3' 7" (1100 mm). Unlimited system widths are possible with the addition of unhinged FourFold or SixFold Panel Sets.

### Thermal Efficiency and Glazing Options

A fundamental benefit of this Generation 4 folding glass wall is energy efficiency. Depending on glass type selected, NW Aluminum 840 is up to 20% more thermally efficient than other NanaWall aluminum framed folding product making it an ideal choice for climates requiring superior thermal performance. The system comes standard with continuous seals along the face of each panel frame. Furthermore, standard for each system are two levels of insulating thermal breaks for optimal defense from heat and cold.

The glass pocket can accommodate glass from 7/8" (22 mm) to 2 7/16" (62 mm) insulated glass.

### Florida Product Approval







NW Aluminum 840 for all panel sizes and configurations is Florida statewide approved with Product Approval number FL40273. This approval includes inswing, outswing, and cornerless units.

### Finishes

NW Aluminum 840 is available in 50 standard powder coat colors in standard AAMA 2604 (2605 optional) and over another 200 optional colors available in powder coat and anodized finishes. Custom matched colors, steel-effect DB colors, and simulated wood effects are also available. For accurate color swatch examples, please request our Powder Coating Finish Options brochure.

## Hybrid Sill

### NW Aluminum 840

| TYPE OF TEST   | INWARD OPENING UNITS  |  | OUTWARD OPENING UNITS  |                              |
|--|---|--|--|------------------------------|
| <div></div> <div><b>Air Infiltration</b> <sup>①</sup></div> <div>ASTM E-283, ft³/min./ft. and NFRC 400</div>  | <div>@ <b>1.57</b> psf (75 Pa): <b>0.04</b></div> <div>(0.04 exfiltration)</div> <div><b>A3</b> <sup>②</sup></div>  |  | <div>@ <b>1.57</b> psf (75 Pa): <b>0.04</b></div> <div>(0.04 exfiltration)</div> <div><b>A3</b> <sup>②</sup></div> |                              |
|  | <div>@ <b>6.24</b> psf (300 Pa): <b>0.11</b></div>  |  | <div>@ <b>6.24</b> psf (300 Pa): <b>0.10</b></div>   |                              |
| <div></div> <div><b>Water Penetration</b> <sup>①*</sup></div> <div>ASTM E-547 and E-331</div>   | <div><b>No uncontrolled water entry</b> <sup>①</sup></div> <div>@ <b>9</b> psf (450 Pa)</div> <div>Please contact NanaWall for more information when higher water ratings are necessary.</div>  |  |  |                              |
| <div></div> <div><b>Structural Load</b> <sup>①</sup></div> <div>ASTM E-330: pass</div> <div><b>See design windload charts for other sized panels</b></div> <div><i>Note that the structural test pressures were 50% higher than the design pressures shown.</i></div> | <b>DESIGN PRESSURE</b>  |  | <b>DESIGN PRESSURE</b>   |                              |
|  | Positive  | Negative   | Positive   | Negative                     |
|  | @ <b>50</b> psf<br>(2400 Pa)  | @ <b>55</b> psf<br>(2670 Pa)   | @ <b>55</b> psf<br>(2670 Pa)   | @ <b>50</b> psf<br>(2400 Pa) |
|  | Uniform Load<br>Deflection, L/175   |  | Uniform Load<br>Deflection, L/175  |                              |
| @ <b>40</b> psf<br>(1945 Pa)   |   | @ <b>45</b> psf<br>(2150 Pa)   |  |                              |
| Class CW-PG40 - FLD 4000 x 2600 &<br>Class LC-PG50 - FLD 4000 x 2600   |   | Class CW-PG40 - FLD 4000 x 2600 &<br>Class LC-PG50 - FLD 4000 x 2600 |  |                              |
| <div></div> <div><b>Forced Entry Resistance</b> <sup>①</sup></div> <div>AAMA-1304</div>   | <div>In accordance with AAMA-1304 requirements</div> <div>(European PAS24 Certified with optional security package)</div>   |  |  |                              |
| <div></div> <div><b>Operating Force</b> <sup>①</sup></div> <div>ASTM E2068</div>  | <div>The NW Aluminum 840 meets:</div> <ul style="list-style-type: none"><li>• Swing Panel: Open 1 lbf (2.8 N) &amp; Close 1 lbf (3.9 N)</li><li>• Folding Panels: Initiate Motion - Open 4 lbf (20 N) &amp; Close 3 lbf (15 N)</li><li>• Folding Panels: Maintain Motion - Open 1 lbf (3 N) &amp; Close 1 lbf (4 N)</li></ul> |  |  |                              |
| <div></div> <div><b>Operation / Cycling Performance</b></div> <div>AAMA 920 &amp; DIN EN 1191</div> <div>Windows and Pedestrian Doors - Mechanical Durability</div>   | <div>The NW Aluminum 840 meets:</div> <ul style="list-style-type: none"><li>• "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass</li><li>• German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional</li></ul>       |  |  |                              |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/I.S.2/A440-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

\* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.



### Thermal Performance

NW Aluminum 840 <sup>③</sup> - Rated, certified, and labeled  
in accordance with NFRC 100 + 200

| TYPE OF GLASS (1 LITE) <sup>④</sup>                 | CENTER OF GLASS U-FACTOR | INWARD OPENING UNITS |                   |                 |                  | OUTWARD OPENING UNITS |                   |                 |                  |
|---|--------------------------|----------------------|-------------------|-----------------|------------------|-----------------------|-------------------|-----------------|------------------|
|   |                          | UNIT U-FACTOR        | SHGC <sup>⑤</sup> | VT <sup>⑥</sup> | 2015 ENERGY STAR | UNIT U-FACTOR         | SHGC <sup>⑤</sup> | VT <sup>⑥</sup> | 2015 ENERGY STAR |
| Double IG Clear (air filled)                        | .48                      | .47                  | .58               | .60             | –                | .48                   | .58               | .60             | –                |
| Double IG Standard Low E (argon filled)             | .25                      | .31                  | .26               | .51             | –                | .31                   | .26               | .51             | –                |
| Double IG Standard Low E (air filled)               | .30                      | .34                  | .26               | .51             | –                | .35                   | .26               | .51             | –                |
| Triple IG Low E x 2 (argon filled)                  | .12                      | .20                  | .22               | .40             | *                | .21                   | .22               | .40             | *                |
| Triple IG Low E x 2 (air filled)                    | .15                      | .23                  | .22               | .40             | *                | .23                   | .22               | .40             | *                |
| Double IG Alternate Lower SHGC Low E (argon filled) | .25                      | .30                  | .19               | .37             | *                | .31                   | .19               | .37             | –                |
| Double IG Alternate Lower SHGC Low E (air filled)   | .29                      | .33                  | .20               | .37             | –                | .34                   | .20               | .37             | –                |

#### NOTES

③ U-Factor, SHGC & VT for NW Aluminum 840 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

④ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.






⑤ SHGC = Solar Heat Gain Coefficient  
⑥ VT = Visible Transmittance

\* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones  $\leq 30$ , SHGC  $\leq 25$  in South/South Central zones and  $\leq 40$  in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.

## Low Profile Saddle Sill

## NW Aluminum 840

| TYPE OF TEST   | INWARD OPENING UNITS  |  | OUTWARD OPENING UNITS  |  |
|--|---|--|--|--|
| <div></div> <div>Air Infiltration <sup>①</sup></div> <div>ASTM E-283, ft³/min/ft. and NFRC 400</div>  | <div>@ 1.57 psf (75 Pa): 0.12</div> <div>(0.12 exfiltration)</div> <div>A2 <sup>②</sup></div>   |  | <div>@ 1.57 psf (75 Pa): 0.12</div> <div>(0.12 exfiltration)</div> <div>A2 <sup>②</sup></div>  |  |
|  | <div>@ 6.24 psf (300 Pa): 0.30</div>  |  | <div>@ 6.24 psf (300 Pa): 0.29</div>   |  |
| <div></div> <div>Water Penetration <sup>①*</sup></div> <div>ASTM E-547 and E-331</div>  | <div>No uncontrolled water entry <sup>①</sup></div> <div>@ 5.43 psf (260 Pa)</div> <div>Subject to the following adaptations of the sill in the field by others;</div> <div><div>1. Remove the gaskets covering the inner channel.</div><div>2. Drill weep holes through the bottom of the channel and drill weep holes from the middle channel to the exterior bottom hollow in sill (about one 5/16" weep hole per panel).</div><div>3. Drill weep holes through the lower front face of sill to the inner channel bottom (3/8" weep hole per panel).</div></div> <div>Please note that due to the varying site requirements and conditions, these sills will not be prepared for drainage by NanaWall. If this drainage system is desired, we recommend that qualified professionals construct this system on the project site strictly in accordance with instructions provided by NanaWall and in accordance with good waterproofing techniques, if drain connections are not made or not possible, unit may leak with wind driven rain.</div> |  |  |  |
|  |   |  |  |  |
| <div></div> <div>Structural Load <sup>①</sup></div> <div>ASTM E-330: pass</div> <div>See design windload charts for other sized panels</div> <div>Note that the structural test pressures were 50% higher than the design pressures shown.</div> | <div>DESIGN PRESSURE</div> <div>Positive</div> <div>@ 50 psf</div> <div>(2400 Pa)</div>   |  | <div>DESIGN PRESSURE</div> <div>Positive</div> <div>@ 50 psf</div> <div>(2400 Pa)</div>  |  |
|  | <div>Negative</div> <div>@ 50 psf</div> <div>(2400 Pa)</div>  |  | <div>Negative</div> <div>@ 50 psf</div> <div>(2400 Pa)</div>   |  |
|  | <div>Uniform Load</div> <div>Deflection, L/175</div> <div>@ 40 psf</div> <div>(1945 Pa)</div> <div>Class CW-PG35 - FLD 4000 x 2600</div>  |  | <div>Uniform Load</div> <div>Deflection, L/175</div> <div>@ 40 psf</div> <div>(1945 Pa)</div> <div>Class CW-PG35 - FLD 4000 x 2600</div> |  |
|  |   |  |  |  |
| <div></div> <div>Forced Entry Resistance <sup>①</sup></div> <div>AAMA-1304</div>  | <div>In accordance with AAMA-1304 requirements</div> <div>(European PAS24 Certified with optional security package)</div>   |  |  |  |
| <div></div> <div>Operating Force <sup>①</sup></div> <div>ASTM E2068</div>   | <div>The NW Aluminum 840 meets:</div> <div><div>• Swing Panel: Open 1 lbf (2.8 N) &amp; Close 1 lbf (3.9 N)</div><div>• Folding Panels: Initiate Motion - Open 4 lbf (20 N) &amp; Close 3 lbf (15 N)</div><div>• Folding Panels: Maintain Motion - Open 1 lbf (3 N) &amp; Close 1 lbf (4 N)</div></div>   |  |  |  |
| <div></div> <div>Operation / Cycling Performance</div> <div>AAMA 920 &amp; DIN EN 1191</div> <div>Windows and Pedestrian Doors - Mechanical Durability</div>  | <div>The NW Aluminum 840 meets:</div> <div><div>• "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass</div><div>• German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional</div></div>   |  |  |  |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/IS.2/A440-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

\* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.



### Thermal Performance

NW Aluminum 840<sup>③</sup> - Rated, certified, and labeled  
in accordance with NFRC 100 + 200

|   |                          | INWARD OPENING UNITS |                   |                 |                  | OUTWARD OPENING UNITS |                   |                 |                  |
|---|--------------------------|----------------------|-------------------|-----------------|------------------|-----------------------|-------------------|-----------------|------------------|
| TYPE OF GLASS (1 LITE) <sup>④</sup>                 | CENTER OF GLASS U-FACTOR | UNIT U-FACTOR        | SHGC <sup>⑤</sup> | VT <sup>⑥</sup> | 2015 ENERGY STAR | UNIT U-FACTOR         | SHGC <sup>⑤</sup> | VT <sup>⑥</sup> | 2015 ENERGY STAR |
| Double IG Clear (air filled)                        | .48                      | .48                  | .58               | .60             | –                | .48                   | .58               | .60             | –                |
| Double IG Standard Low E (argon filled)             | .25                      | .31                  | .26               | .51             | –                | .32                   | .26               | .51             | –                |
| Double IG Standard Low E (air filled)               | .30                      | .35                  | .26               | .51             | –                | .35                   | .26               | .51             | –                |
| Triple IG Low E x 2 (argon filled)                  | .12                      | .21                  | .22               | .40             | *                | .21                   | .22               | .40             | *                |
| Triple IG Low E x 2 (air filled)                    | .15                      | .23                  | .22               | .40             | *                | .24                   | .22               | .40             | *                |
| Double IG Alternate Lower SHGC Low E (argon filled) | .25                      | .31                  | .20               | .37             | –                | .31                   | .20               | .37             | –                |
| Double IG Alternate Lower SHGC Low E (air filled)   | .29                      | .34                  | .20               | .37             | –                | .34                   | .20               | .37             | –                |

**NOTES**

③ U-Factor, SHGC, & VT for NW Aluminum 840 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

④ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.

⑤ SHGC = Solar Heat Gain Coefficient  
⑥ VT = Visible Transmittance


\* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones ≤.30, SHGC ≤.25 in South/South Central zones and ≤.40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.



## Low Profile Saddle Sill with UniverSILL®

### NW Aluminum 840

| TYPE OF TEST   | OUTWARD OPENING UNITS  |  |
|--|--|--|
|  <p><b>Air Infiltration</b> ①</p> <p>ASTM E-283, ft³/min./ft. and NFRC 400</p>  | <p>@ <b>1.57</b> psf (75 Pa): <b>0.04</b><br/>(0.02 exfiltration)</p> <p><b>A3</b> ②</p>   |  |
|  | <p>@ <b>6.24</b> psf (300 Pa): <b>0.07</b></p>   |  |
|  <p><b>Water Penetration</b> ①*</p> <p>ASTM E-547 and E-331</p>   | <p><b>No uncontrolled water entry</b> ①</p> <p>@ <b>7.5</b> psf (360 Pa)</p> <p>UniverSILL transforms a Low Profile Saddle sill to obtain a better water rating when needed and to be easily removed when not required. To meet a water rating with the UniverSILL, the following needs to be done in the field by others:</p> <ol style="list-style-type: none"> <li>1. Weepholes and drainage as described for the low profile saddle sill (minimum needed are weepholes from the middle channel).</li> <li>2. Remove the gasket covering the inner channel and insert the UniverSILL.</li> <li>3. Seals at ends at the side jambs.</li> </ol> |  |
|  <p><b>Structural Load</b> ①</p> <p>ASTM E-330: pass</p> <p><b>See design windload charts for other sized panels</b></p> <p><i>Note that the structural test pressures were 50% higher than the design pressures shown.</i></p> | <p style="text-align: center;"><b>DESIGN PRESSURE</b></p>  |  |
|  | <table border="1"> <tr> <td> <p>Positive</p> <p>@ <b>50</b> psf<br/>(2400 Pa)</p> </td><td> <p>Negative</p> <p>@ <b>50</b> psf<br/>(2400 Pa)</p> </td></tr> </table> <p>Uniform Load<br/>Deflection, L/175</p> <p>@ <b>40</b> psf<br/>(1945 Pa)</p> <p>Class CW-PG40 - FLD 4000 x 2600 &amp;<br/>Class LC-PG50 - FLD 4000 x 2600</p>   | <p>Positive</p> <p>@ <b>50</b> psf<br/>(2400 Pa)</p> |
| <p>Positive</p> <p>@ <b>50</b> psf<br/>(2400 Pa)</p>   | <p>Negative</p> <p>@ <b>50</b> psf<br/>(2400 Pa)</p>   |  |
|  <p><b>Forced Entry Resistance</b> ①</p> <p>AAMA-1304</p>   | <p>In accordance with AAMA-1304 requirements<br/>(European PAS24 Certified with optional security package)</p>   |  |
|  <p><b>Operating Force</b> ①</p> <p>ASTM E2068</p>  | <p>The NW Aluminum 840 meets:</p> <ul style="list-style-type: none"> <li>• Swing Panel: Open 1 lbf (2.8 N) &amp; Close 1 lbf (3.9 N)</li> <li>• Folding Panels: Initiate Motion - Open 4 lbf (20 N) &amp; Close 3 lbf (15 N)</li> <li>• Folding Panels: Maintain Motion - Open 1 lbf (3 N) &amp; Close 1 lbf (4 N)</li> </ul>  |  |
|  <p><b>Operation / Cycling Performance</b></p> <p>AAMA 920 &amp; DIN EN 1191<br/>Windows and Pedestrian Doors -<br/>Mechanical Durability</p>   | <p>The NW Aluminum 840 meets:</p> <ul style="list-style-type: none"> <li>• "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass</li> <li>• German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional</li> </ul>   |  |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/I.S.2/A440-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

\* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.





### Thermal Performance

NW Aluminum 840<sup>③</sup> - Rated, certified, and labeled in accordance with NFRC 100 + 200

| Thermal Performance   |                          | OUTWARD OPENING UNITS |  |     |                  |
|---|--------------------------|-----------------------|--|-----|------------------|
| TYPE OF GLASS (1 LITE) ④  | CENTER OF GLASS U-FACTOR | UNIT U-FACTOR         | SHGC⑤  | VT⑥ | 2015 ENERGY STAR |
| Double IG Clear (air filled)  | .48                      | .48                   | .58  | .60 | –                |
| Double IG Standard Low E (argon filled)   | .25                      | .32                   | .26  | .51 | –                |
| Double IG Standard Low E (air filled)   | .30                      | .35                   | .26  | .51 | –                |
| Triple IG Low E x 2 (argon filled)  | .12                      | .21                   | .22  | .40 | *                |
| Triple IG Low E x 2 (air filled)  | .15                      | .24                   | .22  | .40 | *                |
| Double IG Alternate Lower SHGC Low E (argon filled)   | .25                      | .31                   | .20  | .37 | –                |
| Double IG Alternate Lower SHGC Low E (air filled)   | .29                      | .34                   | .20  | .37 | –                |
| NOTES   |                          |                       |  |     |                  |
| ③ U-Factor, SHGC, & VT for NW Aluminum 840 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.   |                          |                       |  |     |                  |
| ④ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.   |                          |                       | ⑤ SHGC = Solar Heat Gain Coefficient<br>⑥ VT = Visible Transmittance |     |                  |
| * 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones ≤30, SHGC ≤.25 in South/South Central zones and ≤.40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)  |                          |                       |  |     |                  |
| Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available.<br>Please contact NanaWall for more information. |                          |                       |  |     |                  |

## Low Profile Raised Sill

### NW Aluminum 840

| TYPE OF TEST   | INWARD OPENING UNITS   |
|--|--|
| <div></div> <div><b>Air Infiltration</b> <sup>①</sup></div> <div>ASTM E-283, ft³/min./ft. and NFRC 400</div>  | <div>@ <b>1.57</b> psf (75 Pa): <b>0.04</b><br/>(0.04 exfiltration)<br/><b>A3</b> <sup>②</sup></div> <div>@ <b>6.24</b> psf (300 Pa): <b>0.11</b></div>  |
| <div></div> <div><b>Water Penetration</b> <sup>①*</sup></div> <div>ASTM E-547 and E-331</div>   | <div><b>No uncontrolled water entry</b> <sup>①</sup><br/>@ <b>9</b> psf (450 Pa)</div> <div>Please contact NanaWall for more information when higher water ratings are necessary.</div>  |
| <div></div> <div><b>Structural Load</b> <sup>①</sup></div> <div>ASTM E-330: pass<br/><b>See design windload charts for other sized panels</b><br/><i>Note that the structural test pressures were 50% higher than the design pressures shown.</i></div> | <div><b>DESIGN PRESSURE</b></div> <div><div><div>Positive<br/>@ <b>50</b> psf<br/>(2400 Pa)</div><div>Negative<br/>@ <b>55</b> psf<br/>(2670 Pa)</div></div><div>Uniform Load<br/>Deflection, L/175<br/>@ <b>40</b> psf<br/>(1945 Pa)<br/><br/>Class CW-PG40 - FLD 4000 x 2600 &amp;<br/>Class LC-PG50 - FLD 4000 x 2600</div></div>     |
| <div></div> <div><b>Forced Entry Resistance</b> <sup>①</sup></div> <div>AAMA-1304</div>   | <div>In accordance with AAMA-1304 requirements<br/>(European PAS24 Certified with optional security package)</div>   |
| <div></div> <div><b>Operating Force</b> <sup>①</sup></div> <div>ASTM E2068</div>  | <div>The NW Aluminum 840 meets:</div> <div><ul style="list-style-type: none"><li>• Swing Panel: Open 1 lbf (2.8 N) &amp; Close 1 lbf (3.9 N)</li><li>• Folding Panels: Initiate Motion - Open 4 lbf (20 N) &amp; Close 3 lbf (15 N)</li><li>• Folding Panels: Maintain Motion - Open 1 lbf (3 N) &amp; Close 1 lbf (4 N)</li></ul></div> |
| <div></div> <div><b>Operation / Cycling Performance</b></div> <div>AAMA 920 &amp; DIN EN 1191<br/>Windows and Pedestrian Doors -<br/>Mechanical Durability</div>  | <div>The NW Aluminum 840 meets:</div> <div><ul style="list-style-type: none"><li>• "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass</li><li>• German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional</li></ul></div>       |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/I.S.2/A440-17, NAFS-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

\* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.



### Thermal Performance

NW Aluminum 840 <sup>③</sup> - Rated, certified, and labeled  
in accordance with NFRC 100 + 200

|   |                          | INWARD OPENING UNITS |                   |                 |                  |
|---|--------------------------|----------------------|-------------------|-----------------|------------------|
| TYPE OF GLASS (1 LITE) <sup>④</sup>                 | CENTER OF GLASS U-FACTOR | UNIT U-FACTOR        | SHGC <sup>⑤</sup> | VT <sup>⑥</sup> | 2015 ENERGY STAR |
| Double IG Clear (air filled)                        | .48                      | .47                  | .58               | .60             | –                |
| Double IG Standard Low E (argon filled)             | .25                      | .31                  | .26               | .51             | –                |
| Double IG Standard Low E (air filled)               | .30                      | .34                  | .26               | .51             | –                |
| Triple IG Low E x 2 (argon filled)                  | .12                      | .20                  | .22               | .40             | *                |
| Triple IG Low E x 2 (air filled)                    | .15                      | .23                  | .22               | .40             | *                |
| Double IG Alternate Lower SHGC Low E (argon filled) | .25                      | .30                  | .19               | .37             | *                |
| Double IG Alternate Lower SHGC Low E (air filled)   | .29                      | .33                  | .20               | .37             | –                |

#### NOTES

<sup>③</sup> U-Factor, SHGC, & VT for NW Aluminum 840 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

<sup>④</sup> NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.



<sup>⑤</sup> SHGC = Solar Heat Gain Coefficient  
<sup>⑥</sup> VT = Visible Transmittance

\* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones ≤.30, SHGC ≤.25 in South/South Central zones and ≤.40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.

## Flush Sill

### NW Aluminum 840

| TYPE OF TEST   | INWARD OPENING UNITS   |   | OUTWARD OPENING UNITS   |   |
|--|--|---|---|---|
| <div></div> <div><b>Air Infiltration</b> <sup>①</sup></div> <div>ASTM E-283, ft³/min./ft. and NFRC 400</div>  | <div>@ <b>1.57</b> psf (75 Pa): <b>0.12</b></div> <div>(0.12 exfiltration)</div> <div><b>A2</b></div>  |   | <div>@ <b>1.57</b> psf (75 Pa): <b>0.12</b></div> <div>(0.12 exfiltration)</div> <div><b>A2</b></div> |   |
|  | <div>@ <b>6.24</b> psf (300 Pa): <b>0.30</b></div>   |   | <div>@ <b>6.24</b> psf (300 Pa): <b>0.29</b></div>  |   |
| <div></div> <div><b>Structural Load</b> <sup>①</sup></div> <div>ASTM E-330: pass</div> <div>See design windload charts for other sized panels</div> <div>Note that the structural test pressures were 50% higher than the design pressures shown.</div> | <b>DESIGN PRESSURE</b>   |   | <b>DESIGN PRESSURE</b>  |   |
|  | <div>Positive</div> <div>@ <b>50</b> psf</div> <div>(2400 Pa)</div>  | <div>Negative</div> <div>@ <b>50</b> psf</div> <div>(2400 Pa)</div> | <div>Positive</div> <div>@ <b>50</b> psf</div> <div>(2400 Pa)</div>                                   | <div>Negative</div> <div>@ <b>50</b> psf</div> <div>(2400 Pa)</div> |
|  | <div>Uniform Load Deflection, L/175</div> <div>@ <b>40</b> psf</div> <div>(1945 Pa)</div>  |   | <div>Uniform Load Deflection, L/175</div> <div>@ <b>40</b> psf</div> <div>(1945 Pa)</div>             |   |
| <div></div> <div><b>Forced Entry Resistance</b> <sup>①</sup></div> <div>AAMA-1304</div>  | <div>In accordance with AAMA-1304 requirements <sup>①</sup></div> <div>(European PAS24 Certified with optional security package)</div>   |   |   |   |
| <div></div> <div><b>Operating Force</b> <sup>①</sup></div> <div>ASTM E2068</div>  | <div>The NW Aluminum 840 meets:</div> <ul style="list-style-type: none"><li>• Swing Panel: Open 1 lbf (2.8 N) &amp; Close 1 lbf (3.9 N)</li><li>• Folding Panels: Initiate Motion - Open 4 lbf (20 N) &amp; Close 3 lbf (15 N)</li><li>• Folding Panels: Maintain Motion - Open 1 lbf (3 N) &amp; Close 1 lbf (4 N)</li></ul>        |   |   |   |
| <div></div> <div><b>Operation / Cycling Performance</b></div> <div>AAMA 920 &amp; DIN EN 1191</div> <div>Windows and Pedestrian Doors - Mechanical Durability</div>   | <div>The NW Aluminum 840 meets:</div> <ul style="list-style-type: none"><li>• “AAMA 920” requirement for swing panel attached to side jamb: 500,000 cycles - Pass <sup>①</sup></li><li>• German “DIN EN 1191/12400 Classification,” where a unit is tested after 20,000 opening and closing cycles and is still functional</li></ul> |   |   |   |

<sup>①</sup> Derived from excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) with low profile saddle sill specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/1.S.2/A440-17, NAFS-17 - North American Fenestration Standard



### Thermal Performance

NW Aluminum 840 <sup>②</sup> - Rated, certified, and labeled  
in accordance with NFRC 100 + 200

| TYPE OF GLASS (1 LITE) <sup>③</sup>                 | CENTER OF GLASS U-FACTOR | INWARD OPENING UNITS |                   |                 |                  | OUTWARD OPENING UNITS |                   |                 |                  |
|---|--------------------------|----------------------|-------------------|-----------------|------------------|-----------------------|-------------------|-----------------|------------------|
|   |                          | UNIT U-FACTOR        | SHGC <sup>④</sup> | VT <sup>⑤</sup> | 2015 ENERGY STAR | UNIT U-FACTOR         | SHGC <sup>④</sup> | VT <sup>⑤</sup> | 2015 ENERGY STAR |
| Double IG Clear (air filled)                        | .48                      | .48                  | .58               | .60             | –                | .48                   | .58               | .60             | –                |
| Double IG Standard Low E (argon filled)             | .25                      | .31                  | .26               | .51             | –                | .31                   | .26               | .51             | –                |
| Double IG Standard Low E (air filled)               | .30                      | .34                  | .26               | .51             | –                | .35                   | .26               | .51             | –                |
| Triple IG Low E x 2 (argon filled)                  | .12                      | .20                  | .22               | .40             | *                | .21                   | .22               | .40             | *                |
| Triple IG Low E x 2 (air filled)                    | .15                      | .23                  | .22               | .40             | *                | .23                   | .22               | .40             | *                |
| Double IG Alternate Lower SHGC Low E (argon filled) | .25                      | .30                  | .19               | .37             | *                | .31                   | .19               | .37             | –                |
| Double IG Alternate Lower SHGC Low E (air filled)   | .29                      | .34                  | .20               | .37             | –                | .34                   | .20               | .37             | –                |

#### NOTES

② U-Factor, SHGC, & VT for NW Aluminum 840 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

③ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.


④ SHGC = Solar Heat Gain Coefficient  
⑤ VT = Visible Transmittance

\* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones ≤.30, SHGC ≤.25 in South/South Central zones and ≤.40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.

## Design Windload Chart | NW Aluminum 840

**Applies to Negative Design Pressure for Inswing Units with Hybrid Sill and Low Profile Raised Sill and Positive Design Pressure for Outswing Units with the Hybrid Sill**  
(In Accordance with Allowable Stress Design (ASD) Design Pressures\*)

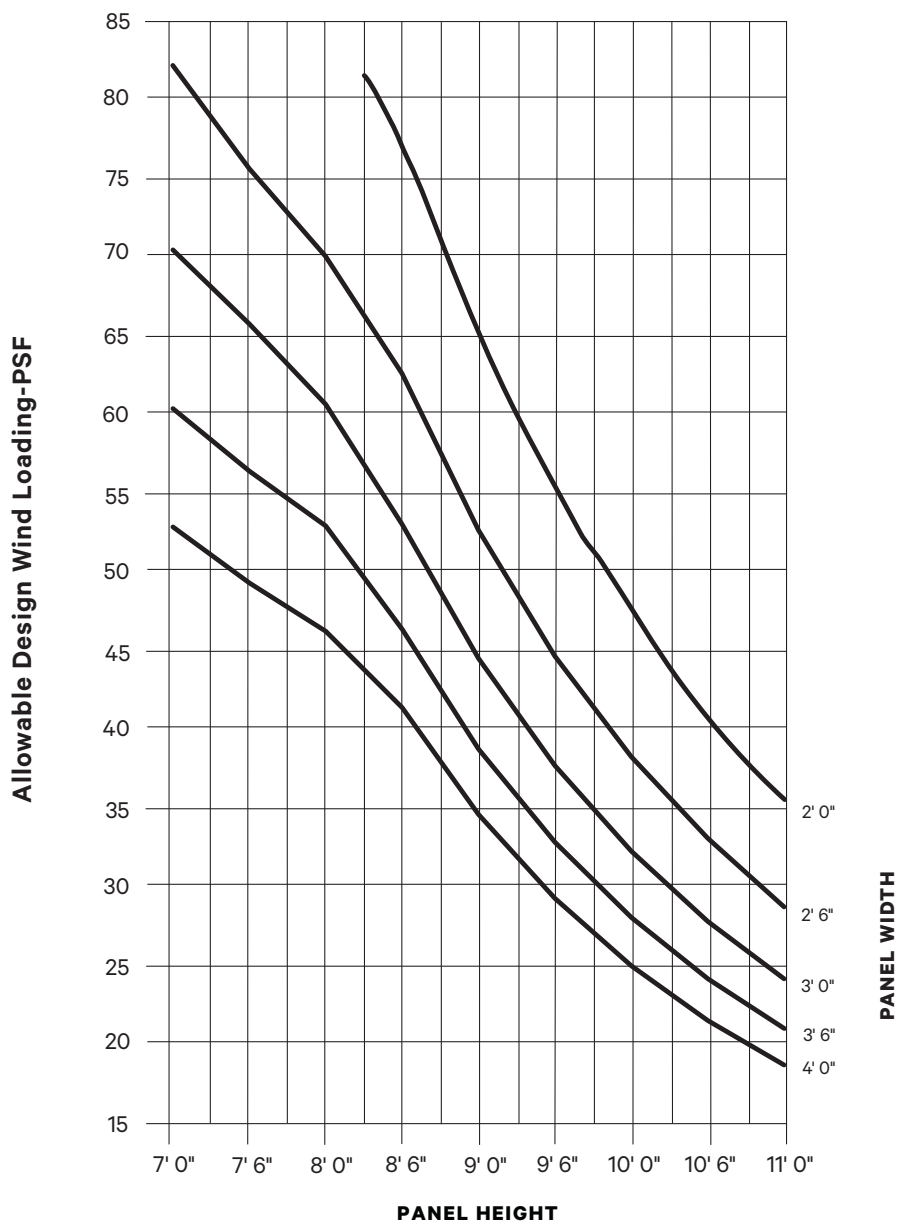

**Any Custom Size is Possible. See Maximum Frame Size Chart for Possible Sizes.**


(Derived from Comparative Analysis) Test Panel Size: 3' 3" W x 8' 2" H.

Please note that some jurisdictions may limit the use of these charts or may not accept them at all. Design pressures and/or sizes may be restricted to what was tested. These charts are also not restricted by any water ratings or deflection limitations. For Florida approval products, please see the FL Evaluation Report and Installation Instructions for restrictions. This chart is only applicable for units with standard NanaWall supplied locking.

\* If the project design pressures have been calculated in accordance with Ultimate Design Wind Speed (ULT), then these design pressures have to be multiplied by a factor of 0.6 to obtain the equivalent ASD design pressures shown in this chart.

## Design Windload Chart | NW Aluminum 840

**Applies to Positive and Negative Design Pressure for both Inswing and Outswing Units with the Low Profile Saddle Sill; Positive Design Pressure for Inswing Units with Hybrid Sill and Low Profile Raised Sill and Negative Design Pressure for Outswing Units with the Hybrid Sill**  
(In Accordance with Allowable Stress Design (ASD) Design Pressures\*)

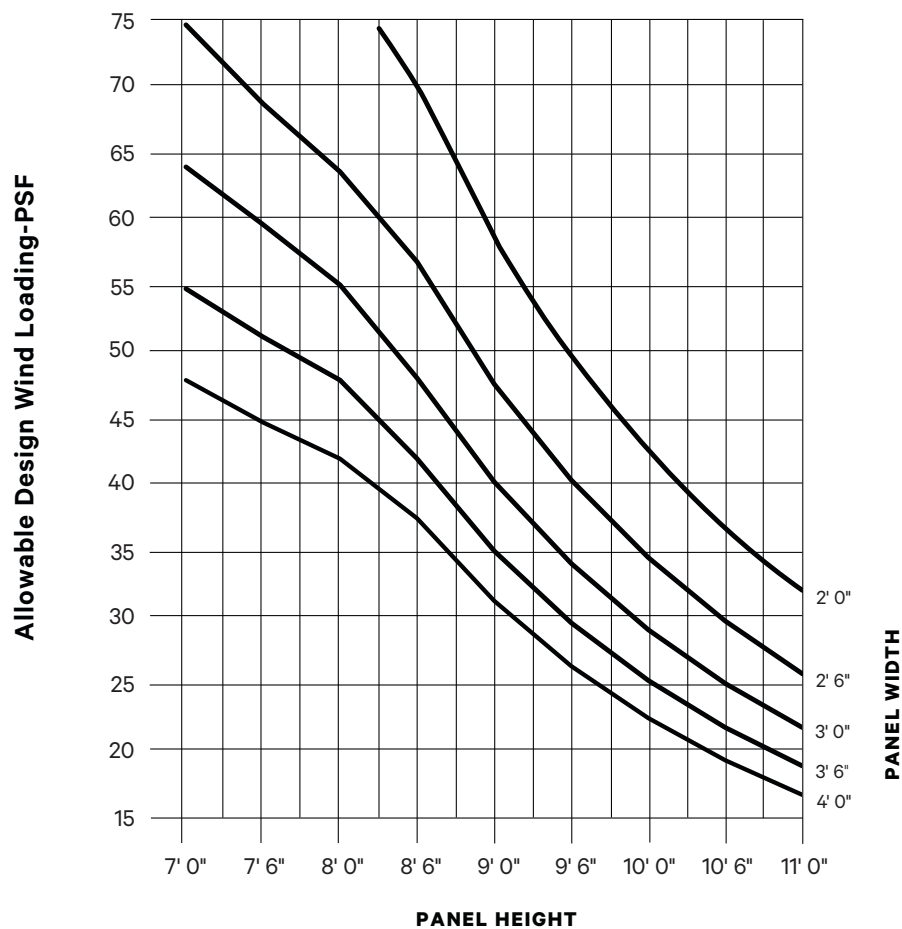

**Any Custom Size is Possible. See Maximum Frame Size Chart for Possible Sizes.**


(Derived from Comparative Analysis) Test Panel Size: 3' 3" W x 8' 2" H.

Please note that some jurisdictions may limit the use of these charts or may not accept them at all. Design pressures and/or sizes may be restricted to what was tested. These charts are also not restricted by any water ratings or deflection limitations. For Florida approval products, please see the FL Evaluation Report and Installation Instructions for restrictions. This chart is only applicable for units with standard NanaWall supplied locking.

\* If the project design pressures have been calculated in accordance with Ultimate Design Wind Speed (ULT), then these design pressures have to be multiplied by a factor of 0.6 to obtain the equivalent ASD design pressures shown in this chart.



## Maximum Size Chart NW Aluminum 840 (Double Glazed)

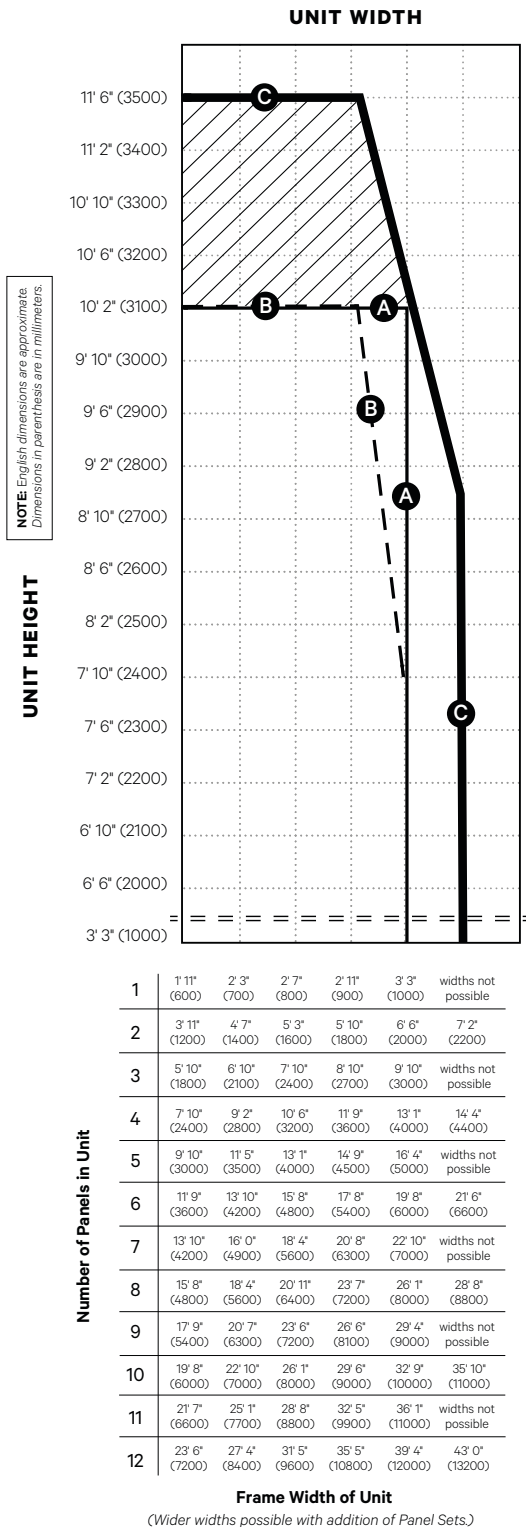

Any Custom Size is Possible Up to the Maximum Size Limit Lines Shown

**MAXIMUM SIZE LIMIT LINE OF:****A CONFIGURATIONS** ———

(Swing panel hinged at jamb only.)

**Standard Configurations:**

|    |       |       |       |       |       |
|----|-------|-------|-------|-------|-------|
| 1L | 1L 1R | 1L 4R | 2L 1R | 4L 1R | 6L 1R |
| 1R | 1L 2R | 1L 6R |       |       |       |

**Sample Configurations with Unhinged FourFold or SixFold Panel Sets:**

1L 4L/R | 1L 6L/R 1R | 4L/R 1R

Addition of Panel Sets to all A Configurations possible.

**B CONFIGURATIONS** - - -

(Swing panel as part of odd number of panels to one side.)

**Standard Configurations:**

|       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|
| 1L 3R | 3L 2R | 5L 1R | 4L 3R | 3L 6R | 5L 5R |
| 3L 1R | 3L 3R | 2L 5R | 5L 2R | 6L 3R | 5L 6R |
| 2L 3R | 1L 5R | 3L 4R | 3L 5R | 5L 3R | 6L 5R |

**Sample Configurations with Unhinged FourFold or SixFold Panel Sets:**

3L 4L/R | 3L 6L/R | 3L 4L/R 3R

Addition of Panel Sets to all B Configurations possible.

**C CONFIGURATIONS** ———

(No swing panels.)

**Standard Configurations:**

|    |    |    |       |       |       |
|----|----|----|-------|-------|-------|
| 2L | 4L | 6L | 2L 2R | 4L 2R | 6L 2R |
| 2R | 4R | 6R | 2L 4R | 4L 4R | 6L 4R |
|    |    |    | 2L 6R | 4L 6R | 6L 6R |

**Sample Configurations with Unhinged FourFold or SixFold Panel Sets:**

2L 4L/R | 4L/R 4R | 6L 6L/R | 4L/R 4L/R | 6L/R 4L/R

Addition of Panel Sets to all C Configurations possible.



**Horizontal mullion required for unit height taller than 10' 2" (3100 mm) such that no glass pane is more than 7' 10" (2400 mm) tall.**


**GLAZING**

- Glass thicknesses from 7/8" (22 mm) to 2 7/16" (62 mm) can be accommodated.
- Maximum size chart is based on maximum glass weight of 20 kg/m<sup>2</sup> (4 lbs/ft<sup>2</sup>) over 10' 2" (3100 mm) and 30 kg/m<sup>2</sup> (6 lbs/ft<sup>2</sup>) under 10' 2" (3100 mm).
- Dry glazing system.

**NOTES**

- Max. panel width swing panel attached to side jamb 3' 3" (1000 mm).
- Min. panel width 31 1/2" (800 mm) for paired panels hinged to side jamb.
- Min. panel width 25 5/8" (650 mm) for Panel Sets 4L/R, 6L/R.
- Max. number of hinged panels to one side is 6.
- No limitation on number of unhinged panel sets in a unit. Additional adequate structural lateral support by others where panels stack.
- Configurations with even panels meeting even panels, including panel sets, provide lower weather resistant results from tested units.
- Higher sized panels over 10' 2" (3100 mm) in height may need to be operated by more than one person.
- For other configurations, contact NanaWall.

# Maximum Size Chart NW Aluminum 840 (Triple Glazed)

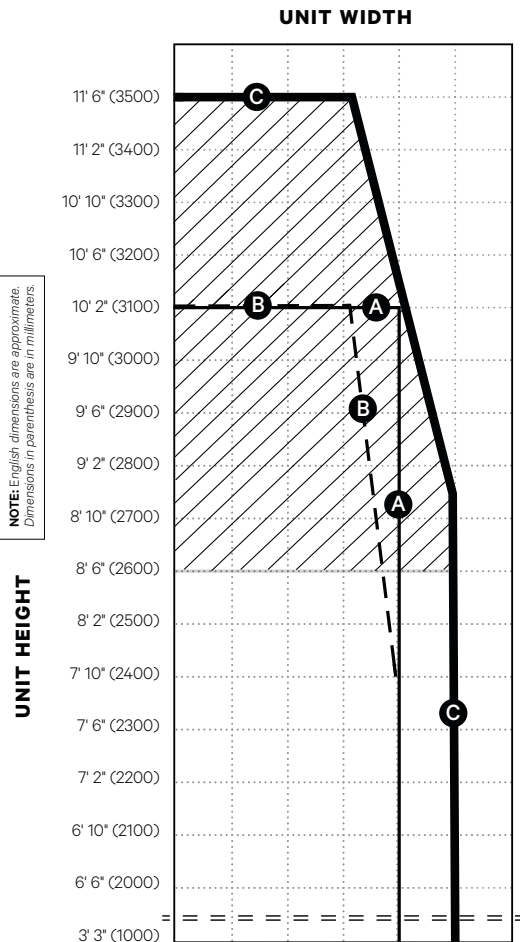

NOTE: English dimensions are approximate.  
Dimensions in parenthesis are in millimeters.

UNIT HEIGHT

|    |                |                |                |                |                |                     |
|----|----------------|----------------|----------------|----------------|----------------|---------------------|
| 1  | 1' 11" (600)   | 2' 3" (700)    | 2' 7" (800)    | 2' 11" (900)   | 3' 3" (1000)   | widths not possible |
| 2  | 3' 11" (1200)  | 4' 7" (1400)   | 5' 3" (1600)   | 5' 10" (1800)  | 6' 6" (2000)   | 7' 2" (2200)        |
| 3  | 5' 10" (1800)  | 6' 10" (2100)  | 7' 10" (2400)  | 8' 10" (2700)  | 9' 10" (3000)  | widths not possible |
| 4  | 7' 10" (2400)  | 9' 2" (2800)   | 10' 6" (3200)  | 11' 9" (3600)  | 13' 1" (4000)  | 14' 4" (4400)       |
| 5  | 9' 10" (3000)  | 11' 5" (3500)  | 13' 1" (4000)  | 14' 9" (4500)  | 16' 4" (5000)  | widths not possible |
| 6  | 11' 9" (3600)  | 13' 10" (4200) | 15' 8" (4800)  | 17' 8" (5400)  | 19' 8" (6000)  | 21' 6" (6600)       |
| 7  | 13' 10" (4200) | 16' 0" (4900)  | 18' 4" (5600)  | 20' 8" (6300)  | 22' 10" (7000) | widths not possible |
| 8  | 15' 8" (4800)  | 18' 4" (5600)  | 20' 11" (6400) | 23' 7" (7200)  | 26' 1" (8000)  | 28' 8" (8800)       |
| 9  | 17' 9" (5400)  | 20' 7" (6300)  | 23' 6" (7200)  | 26' 6" (8100)  | 29' 4" (9000)  | widths not possible |
| 10 | 19' 8" (6000)  | 22' 10" (7000) | 26' 1" (8000)  | 29' 6" (9000)  | 32' 9" (10000) | 35' 10" (11000)     |
| 11 | 21' 7" (6600)  | 25' 1" (7700)  | 28' 8" (8800)  | 32' 5" (9900)  | 36' 1" (11000) | widths not possible |
| 12 | 23' 6" (7200)  | 27' 4" (8400)  | 31' 5" (9600)  | 35' 5" (10800) | 39' 4" (12000) | 43' 0" (13200)      |

## Frame Width of Unit

(Wider widths possible with addition of Panel Sets.)

Any Custom Size is Possible Up to the Maximum Size Limit Lines Shown

## MAXIMUM SIZE LIMIT LINE OF:

### A CONFIGURATIONS

(Swing panel hinged at jamb only.)

#### Standard Configurations:

|    |       |       |       |       |
|----|-------|-------|-------|-------|
| 1L | 1L 1R | 2L 1R | 4L 1R | 6L 1R |
| 1R | 1L 2R | 1L 4R | 1L 6R |       |

#### Sample Configurations with Uninged FourFold or SixFold Panel Sets:

1L 4L/R | 4L/R 1R | 1L 6L/R 1R

Addition of Panel Sets to all A Configurations possible.

### B CONFIGURATIONS

(Swing panel as part of odd number of panels to one side.)

#### Standard Configurations:

|       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|
| 1L 3R | 3L 2R | 5L 1R | 4L 3R | 3L 6R | 5L 5R |
| 3L 1R | 3L 3R | 2L 5R | 5L 2R | 6L 3R | 5L 6R |
| 2L 3R | 1L 5R | 3L 4R | 3L 5R | 5L 3R | 6L 5R |

#### Sample Configurations with Uninged FourFold or SixFold Panel Sets:

3L 4L/R | 3L 6L/R | 3L 4L/R 3R

Addition of Panel Sets to all B Configurations possible.

### C CONFIGURATIONS

(No swing panels.)

#### Standard Configurations:

|    |    |    |       |       |       |
|----|----|----|-------|-------|-------|
| 2L | 4L | 6L | 2L 2R | 4L 2R | 6L 2R |
| 2R | 4R | 6R | 2L 4R | 4L 4R | 6L 4R |
|    |    |    | 2L 6R | 4L 6R | 6L 6R |

#### Sample Configurations with Uninged FourFold or SixFold Panel Sets:

2L 4L/R | 4L/R 4R | 6L 6L/R | 4L/R 4L/R | 6L/R 4L/R

Addition of Panel Sets to all C Configurations possible.




Horizontal mullion required for unit height taller than 8' 6" (2600 mm) such that no glass pane is more than 7' 10" (2400 mm) tall.

## GLAZING


- Glass thicknesses from 1 7/16" (36 mm) to 1 3/4" (45 mm) can be accommodated.
- Maximum size chart is based on maximum glass weight of 30 kg/m<sup>2</sup> (6 lbs/ft<sup>2</sup>) over 9' 0" (2750 mm) and 40 kg/m<sup>2</sup> (8 lbs/ft<sup>2</sup>) under 9' 0" (2750 mm).
- Dry glazing system.

## NOTES


- Max. panel width swing panel attached to side jamb 3' 3" (1000 mm).
- Min. panel width 31 1/2" (800 mm) for paired panels hinged to side jamb.
- Min. panel width 25 5/8" (650 mm) for Panel Sets 4L/R, 6L/R.
- Max. number of hinged panels to one side is 6.
- No limitation on number of uninged panel sets in a unit. Additional adequate structural lateral support by others where panels stack.
- Configurations with even panels meeting even panels, including panel sets, provide lower weather resistant results from tested units.
- Higher sized panels over 10' 2" (3100 mm) in height may need to be operated by more than one person.
- For other configurations, contact NanaWall.

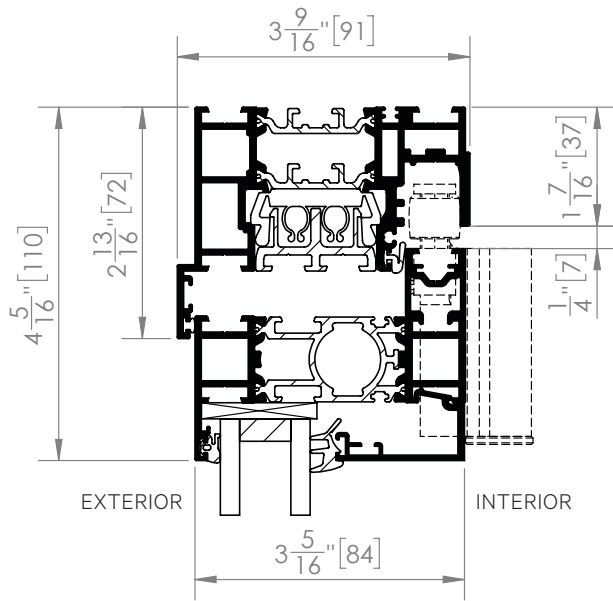

**Detail 1.0**  
Head Jamb

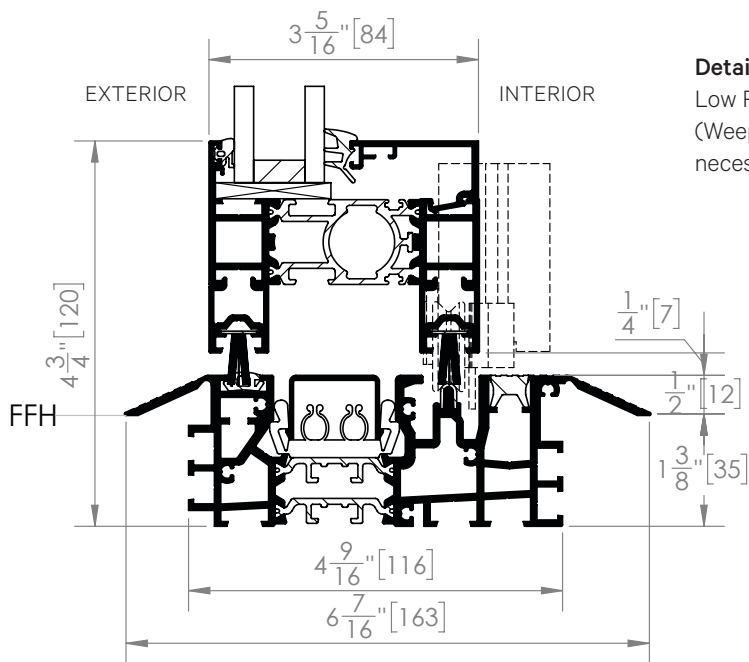


**Detail 22.0**  
Low Profile Saddle Sill  
(Weep holes and drainage by others  
necessary for water rating.)

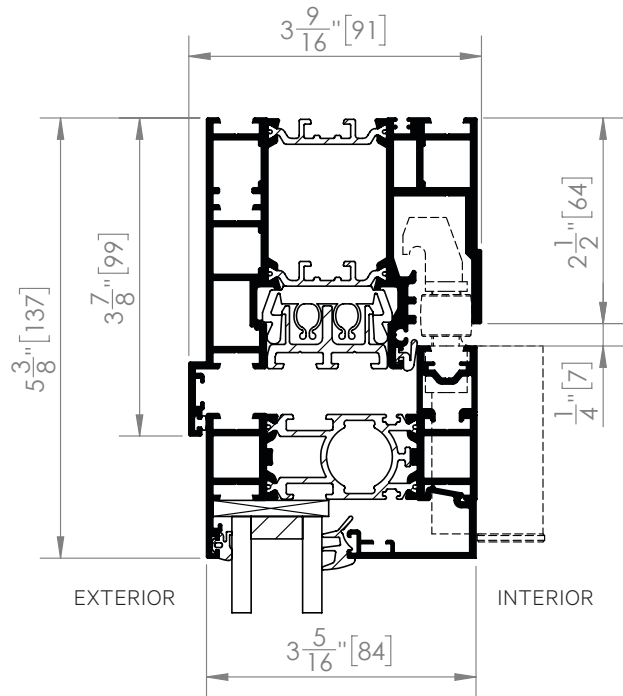


**Detail 12.0**  
Head Jamb for  
UnHINGED Panel Sets


**Detail 23.0**  
Hybrid Sill  
(Proper drainage by others of water  
exiting sill weep slots necessary.)

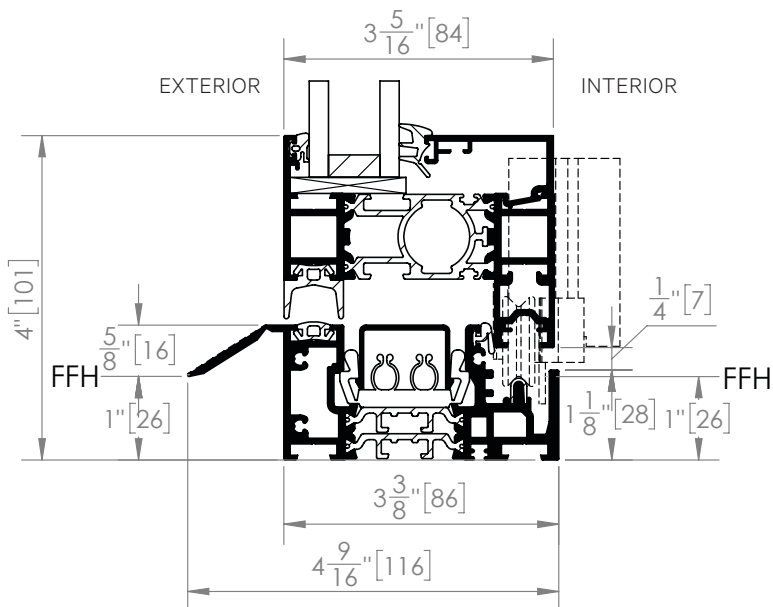


**Detail 2.0**  
Low Profile Raised Sill  
(Proper drainage by others of water  
exiting sill weep slots necessary.)

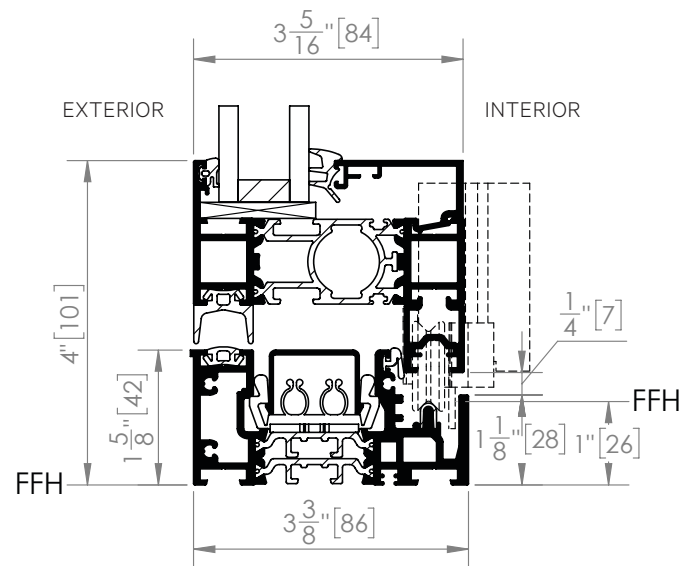



**Detail 24.0**  
Flush Sill  
(No water rating.)

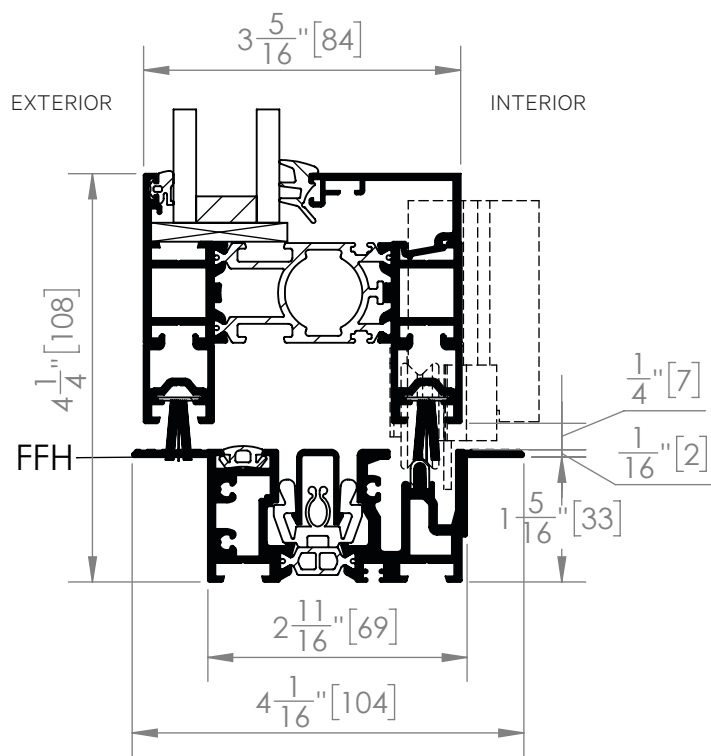

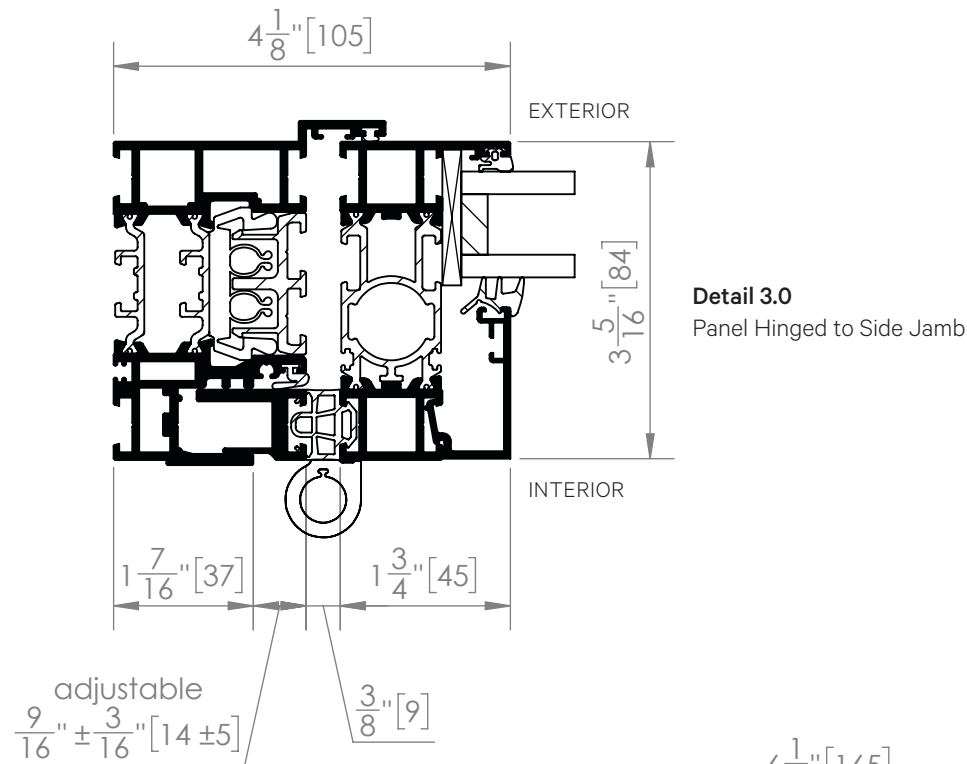



**Detail 4.0**  
Swing Panel with  
Locking at Side Jamb

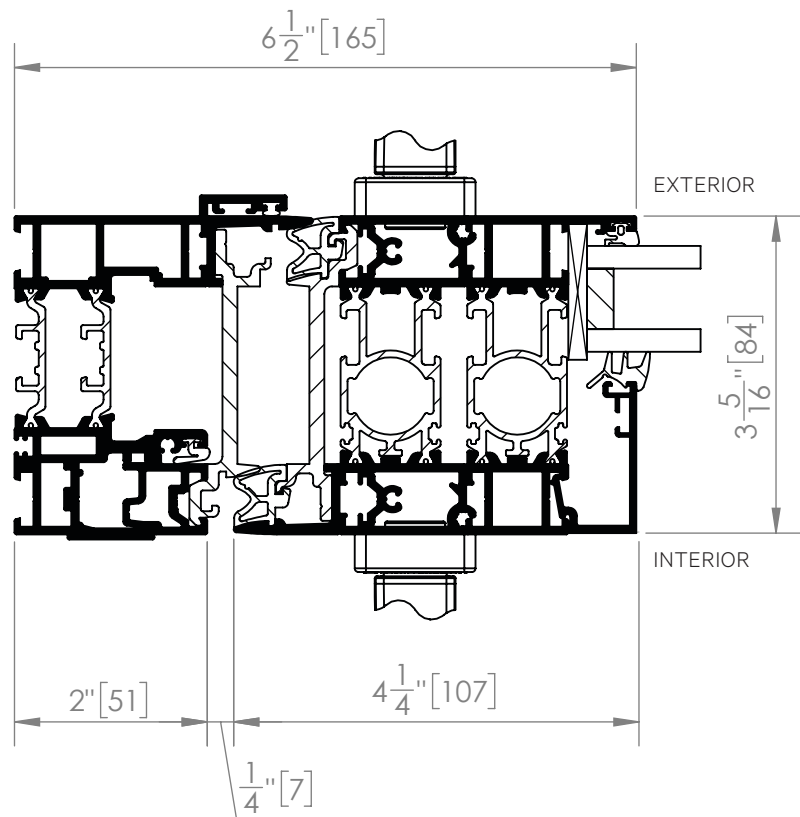

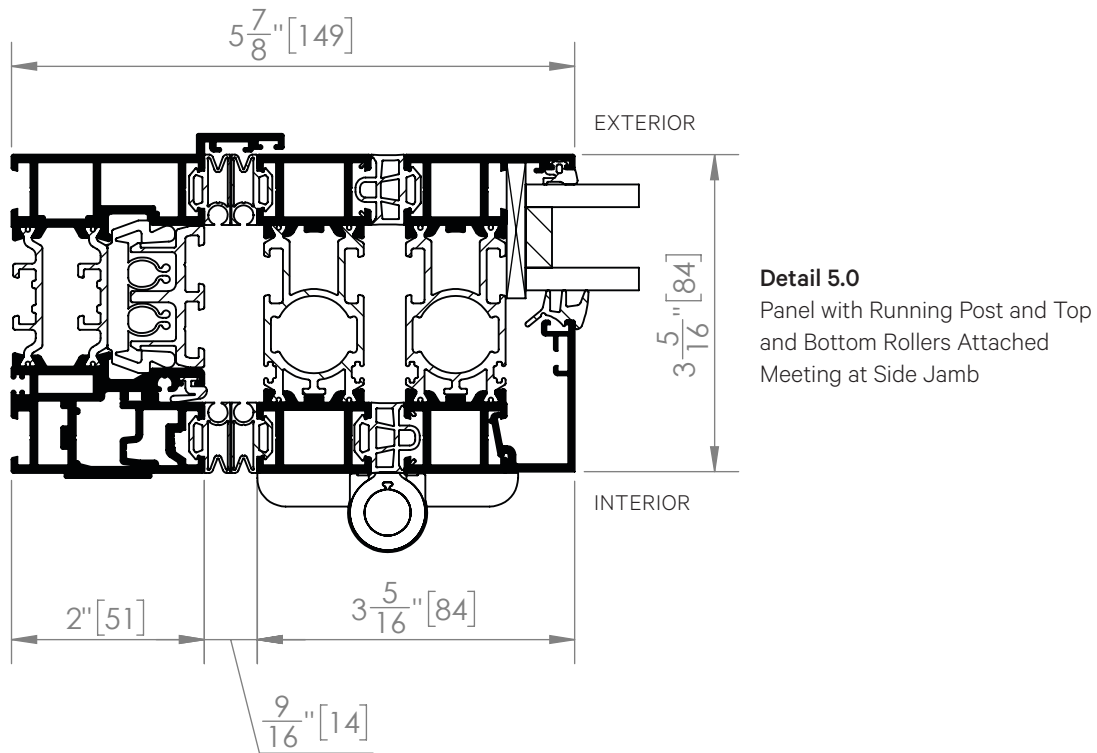


**Detail 7C.0**  
Hinged Folding Panels

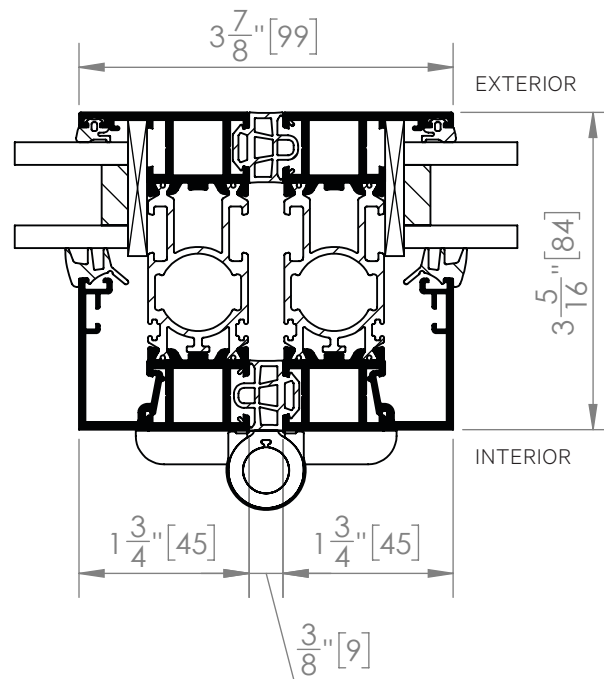

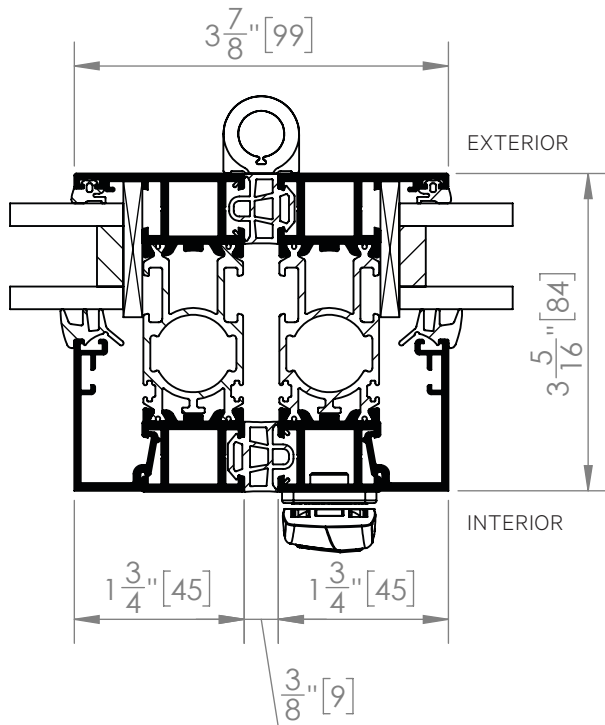


**Detail 7.0**  
Hinged Folding Panels  
with Locking

**Detail 8.0**  
Pair of Swing Panels with  
Primary Swing Panel with Lever  
Handle Locking on Right and  
Secondary Swing Panel with  
Concealed Edge Lock on Left

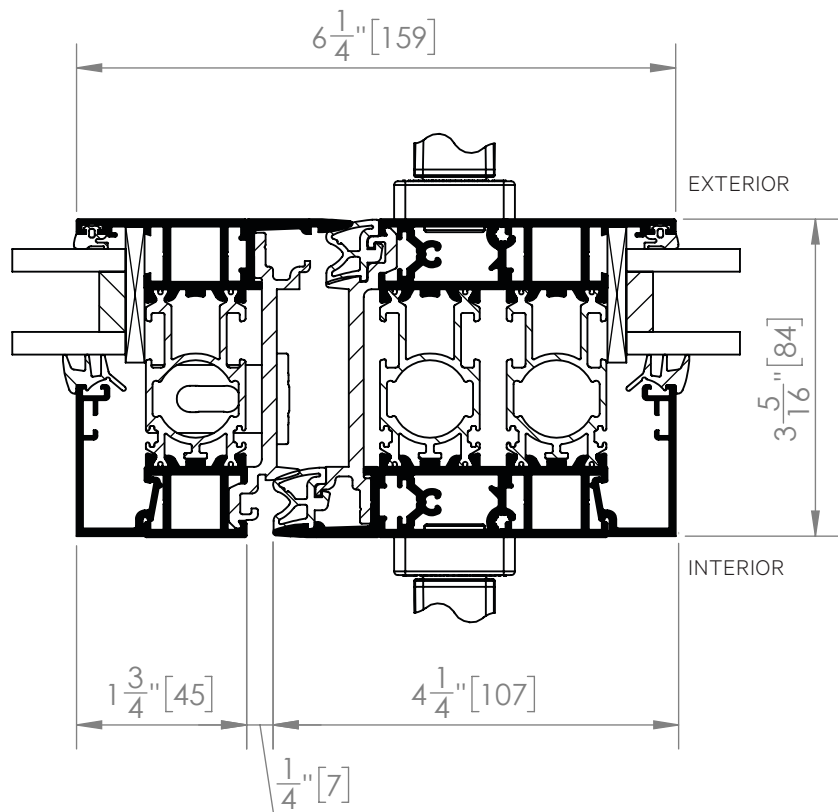


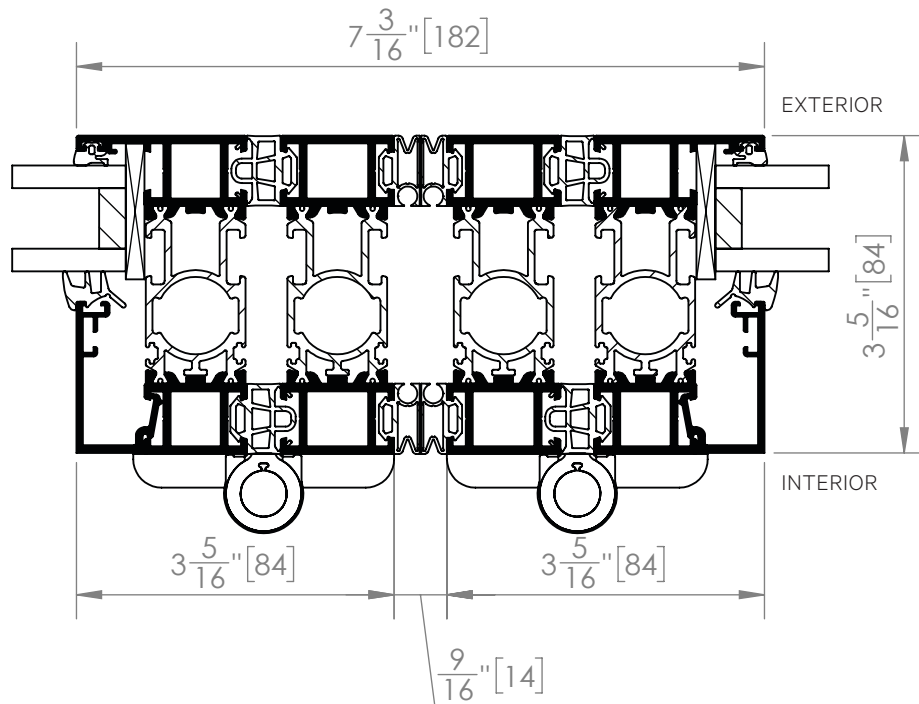


**Detail 9.0**


Meeting of Folding Panels  
with Running Post and Top  
and Bottom Rollers Attached

**Detail 10.0**  
Meeting of Swing Panel with  
Locking and Folding Panel  
with Running Post and Top  
and Bottom Rollers Attached

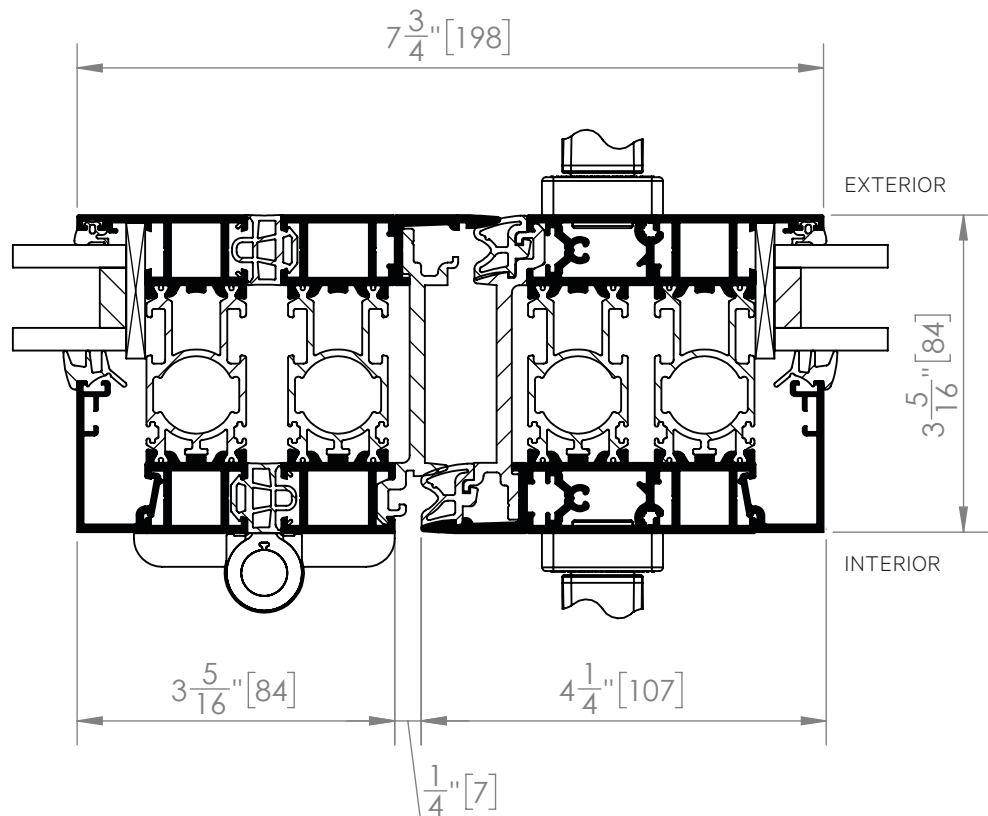

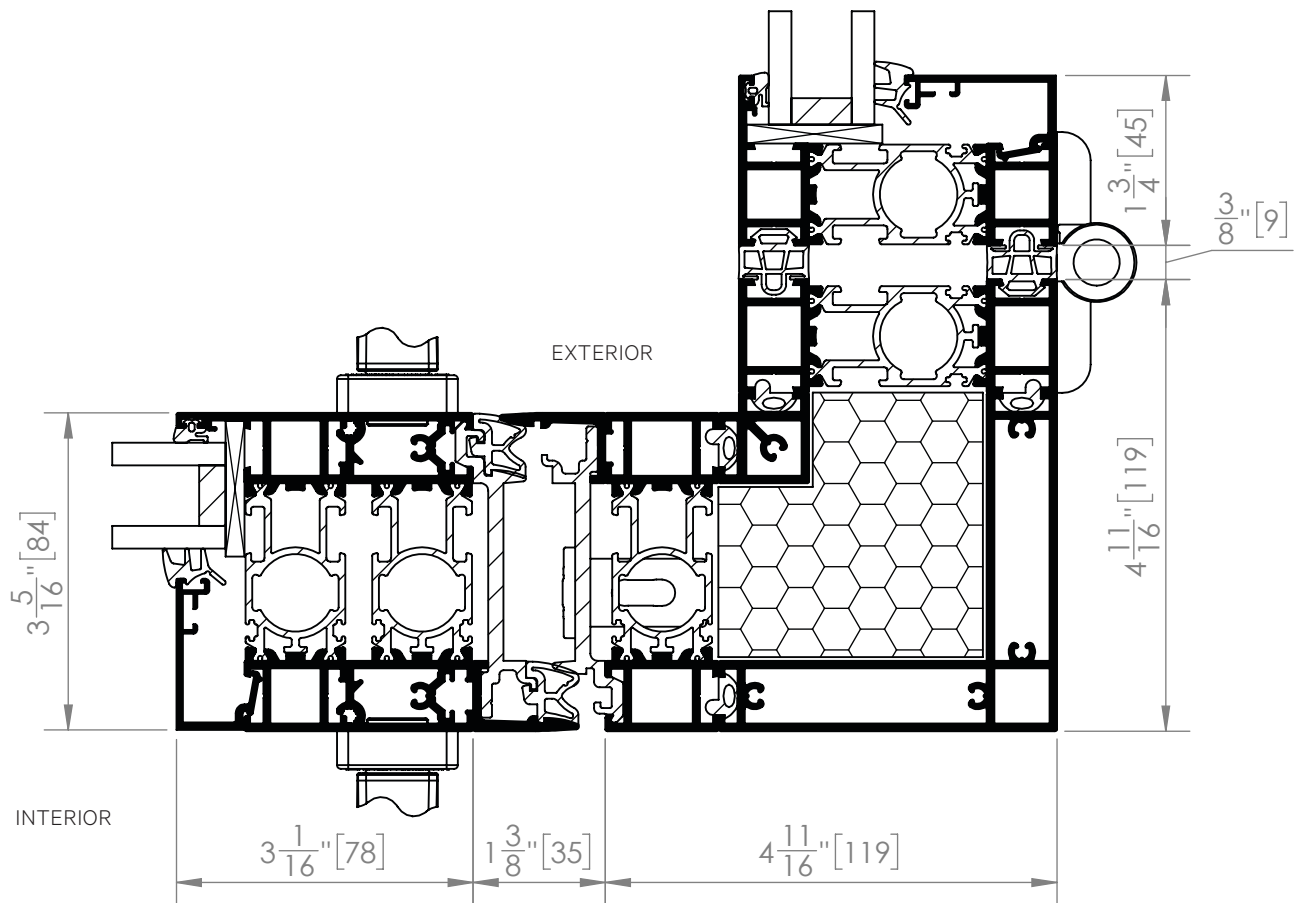**Detail 35.0**


Meeting of Swing Panel with Locking and Folding Panel with a Combined Running Post with Top and Bottom Rollers and a 90-Degree Corner Post Attached with Concealed Edge Lock for an Inside Corner

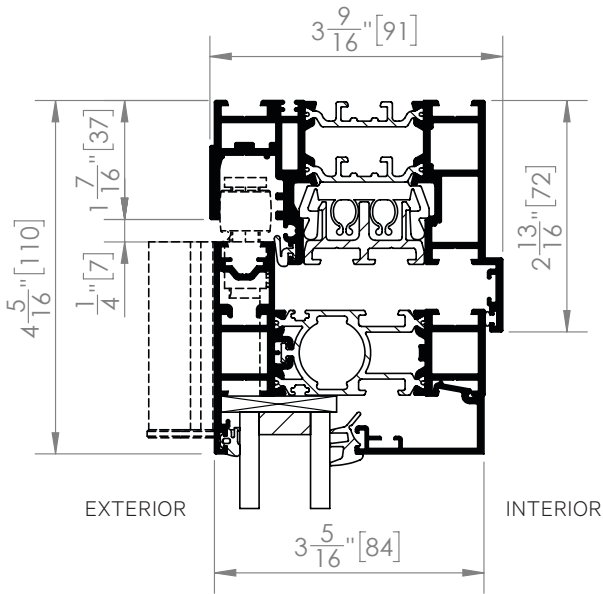

**Detail 1.1**  
Head Jamb


**Detail 22.1**


Low Profile Saddle Sill  
(Weep holes and drainage by others necessary for water rating.)

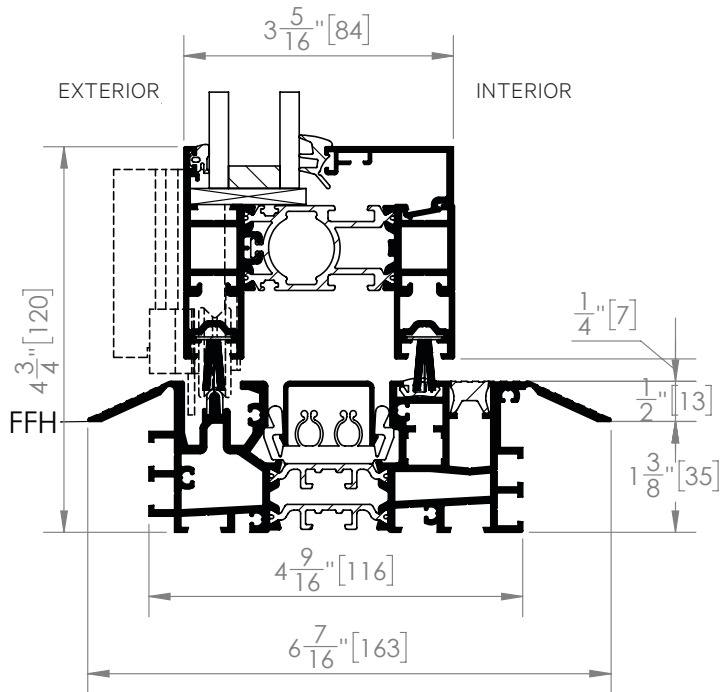

**Detail 22.1 UniverSILL®**

Low Profile Saddle Sill with UniverSILL  
(Weep holes and drainage by others necessary for water rating.)

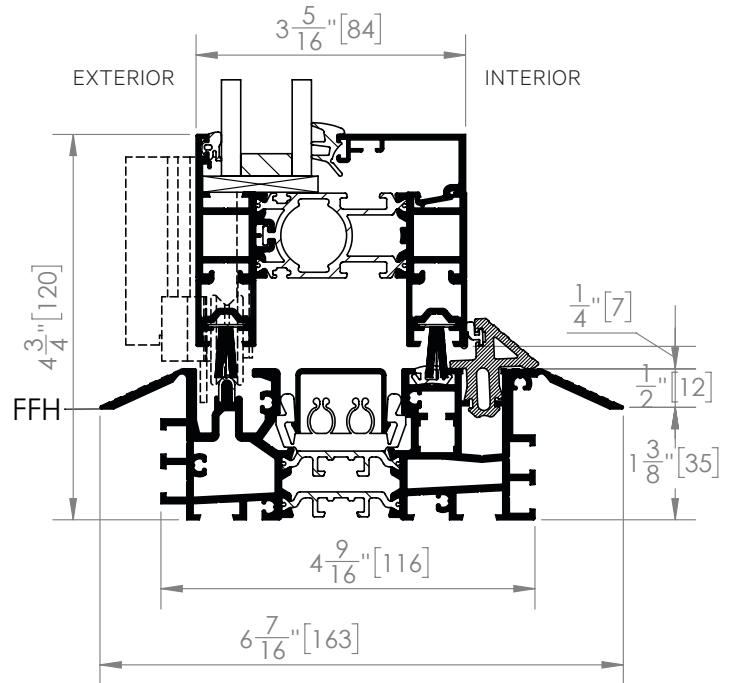

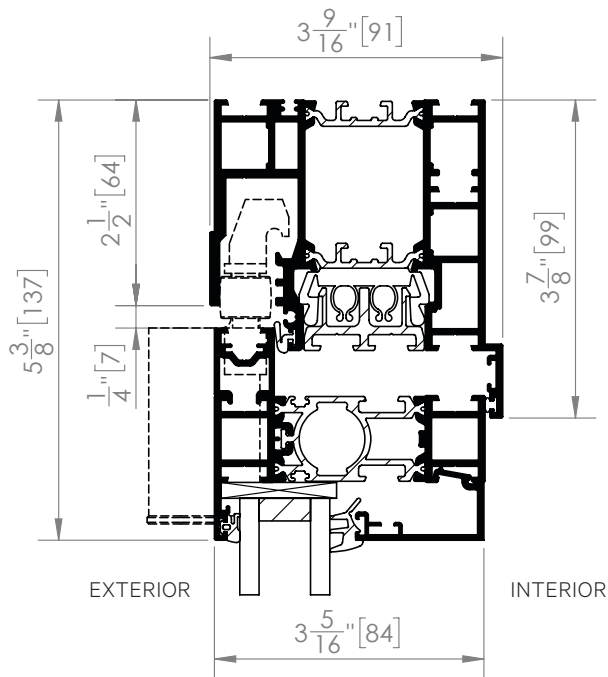
**Detail 12.1**

Head Jamb for UnHINGED Panel Sets

**Detail 23.1**


Hybrid Sill


(Proper drainage by others of water exiting weep slots necessary.)

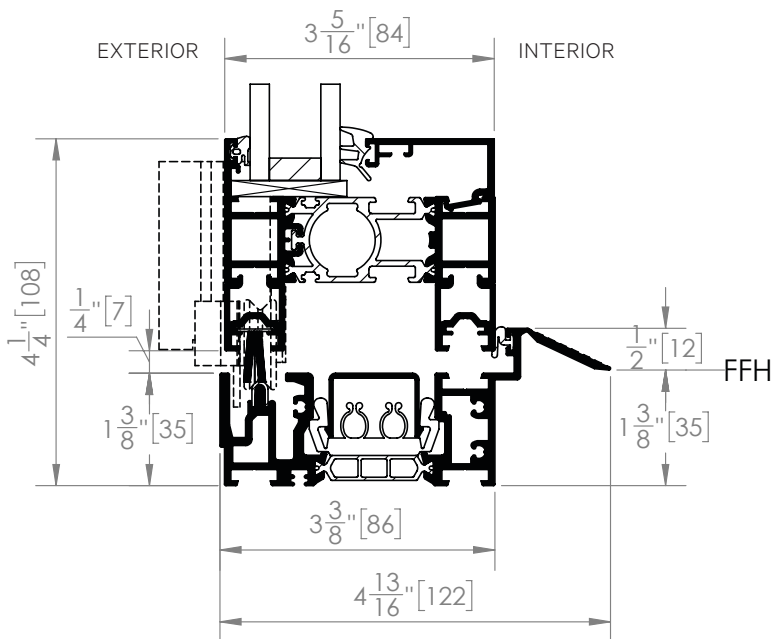**Detail 24.1**


Flush Sill

(No water rating.)

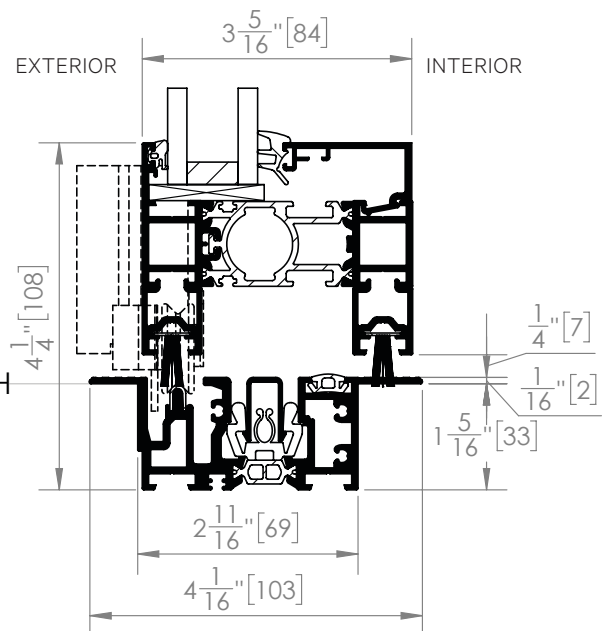


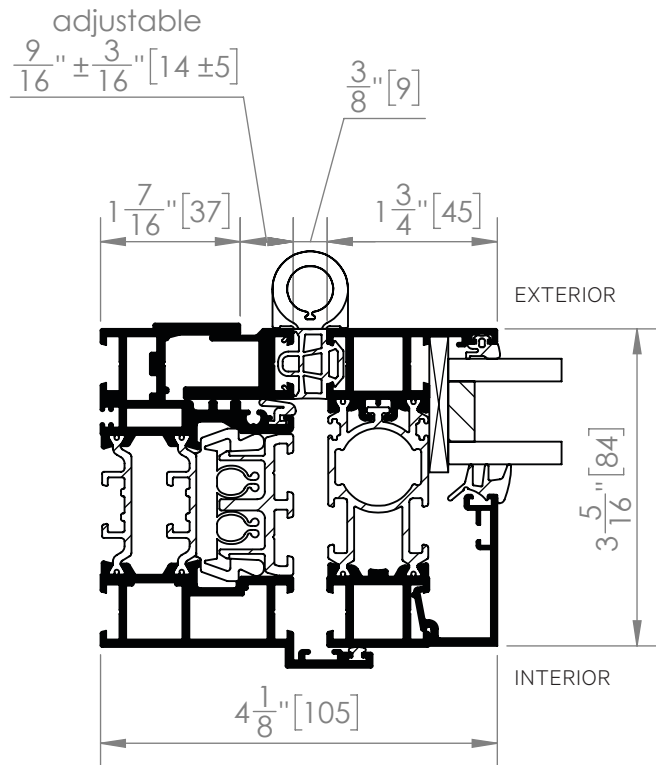

**Detail 3.1**  
 Panel Hinged to Side Jamb

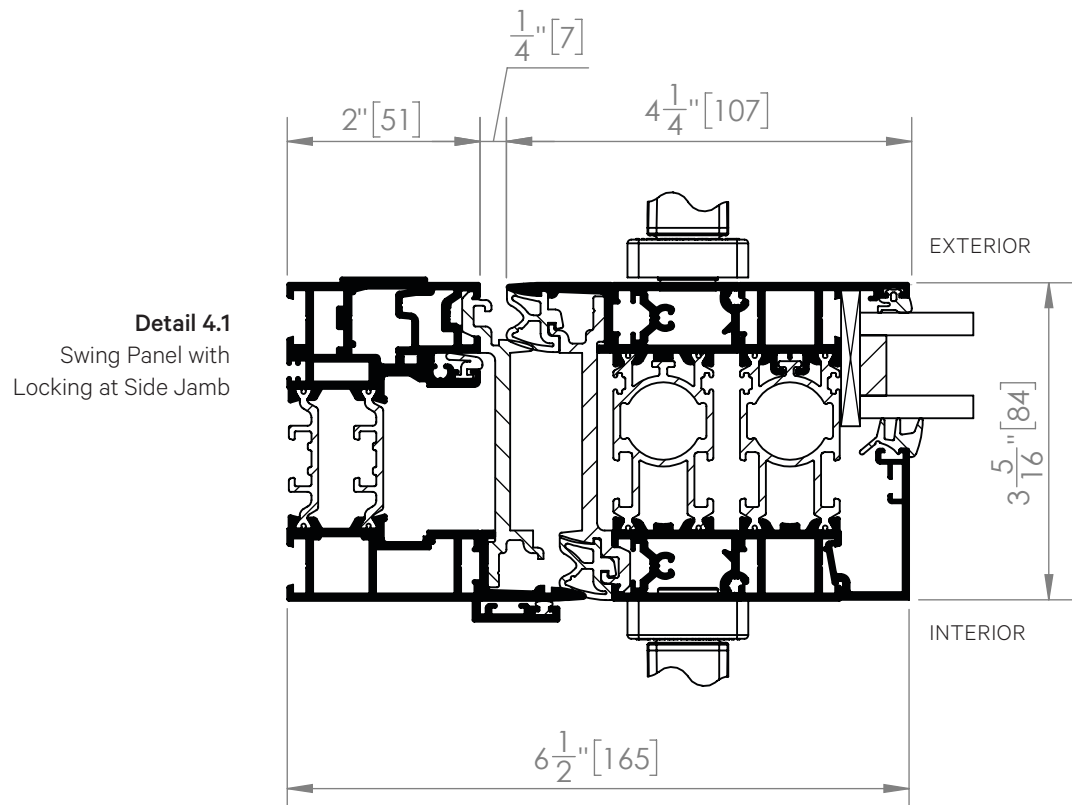



**Detail 4.1**  
 Swing Panel with  
 Locking at Side Jamb

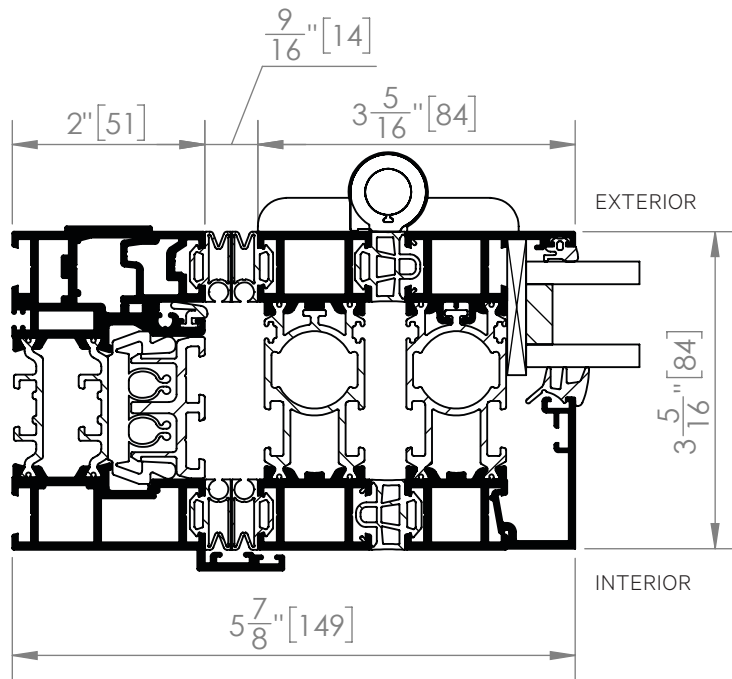**Detail 5.1**

Panel with Running Post  
and Top and Bottom Rollers  
Attached Meeting at Side Jamb


**Detail 7C.1**  
Hinged Folding  
Panels

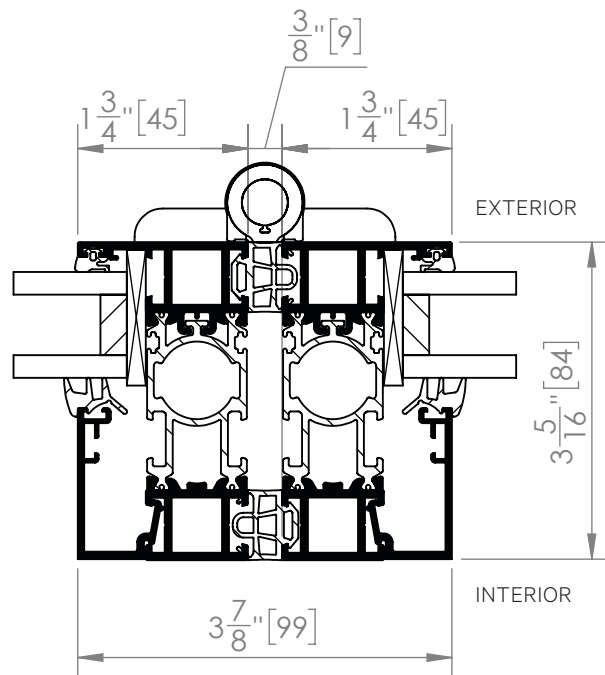


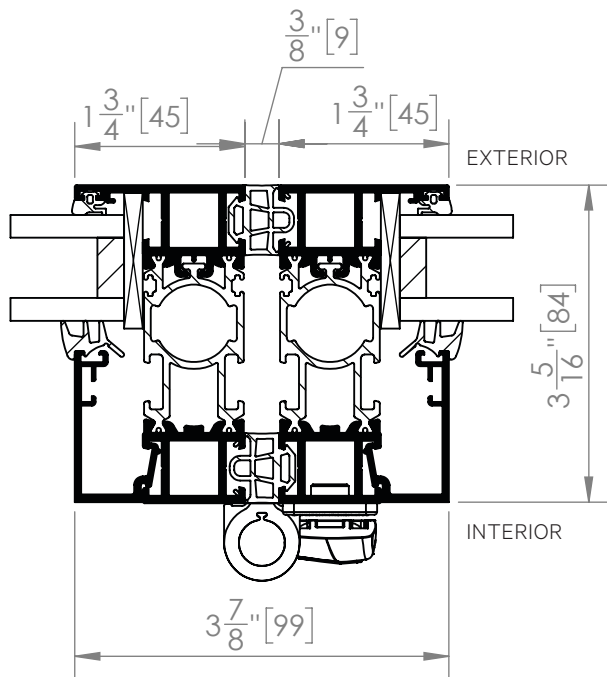

**Detail 7.1**  
Hinged Folding Panels  
with Locking


**Detail 8.1**  
Pair of Swing Panels with  
Primary Swing Panel with  
Lever Handle Locking on  
Right and Secondary Swing  
Panel with Concealed Edge  
Lock on Left

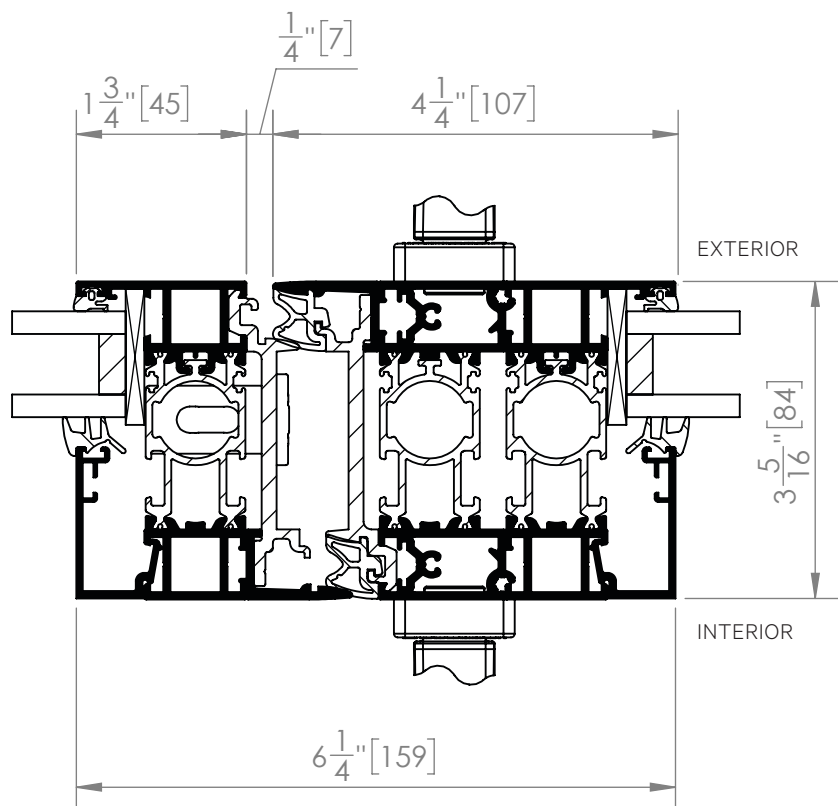

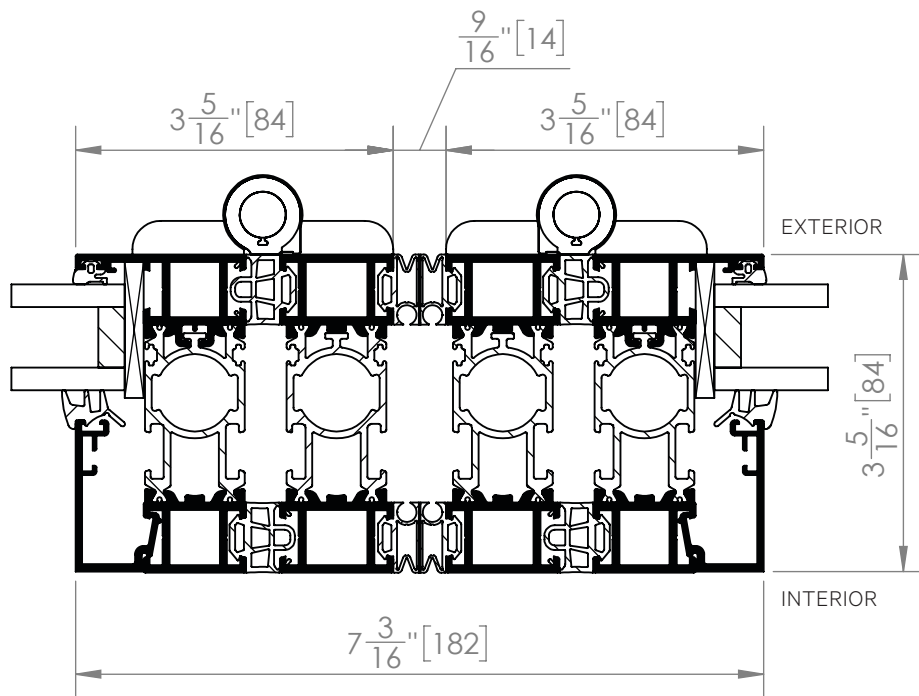
**Detail 9.1**

Meeting of Folding Panels with  
Running Post and Top and  
Bottom Rollers Attached





**Detail 10.1**  
Meeting of Swing Panel with  
Locking and Folding Panel  
with Running Post and Top  
and Bottom Rollers Attached

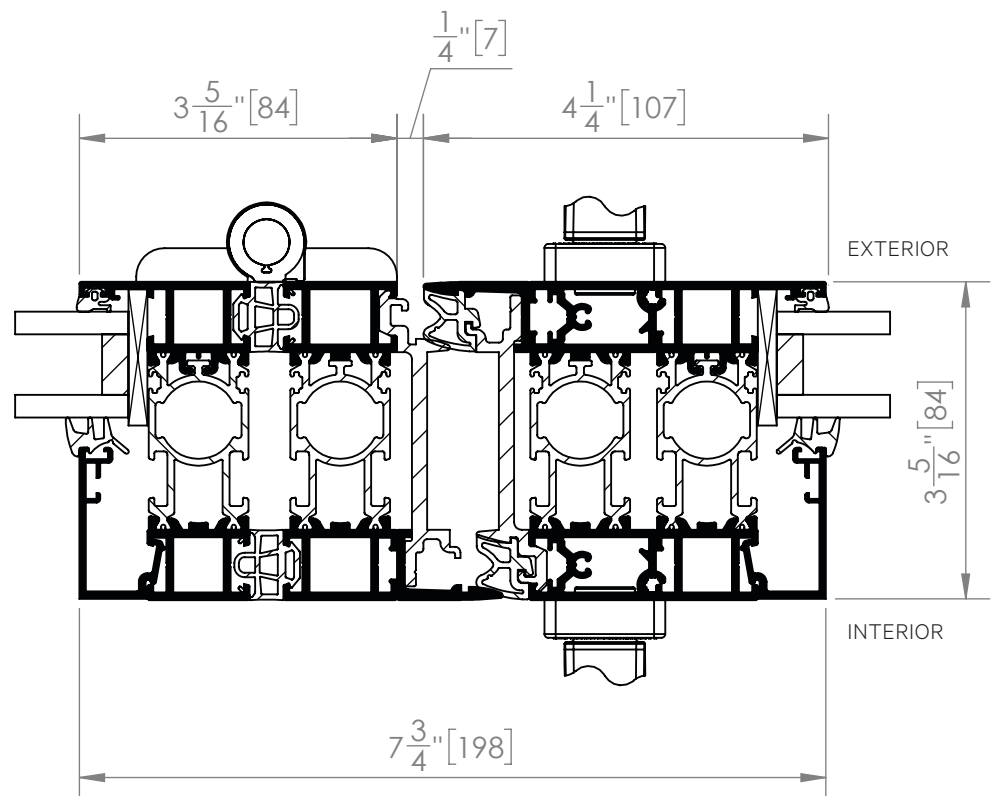

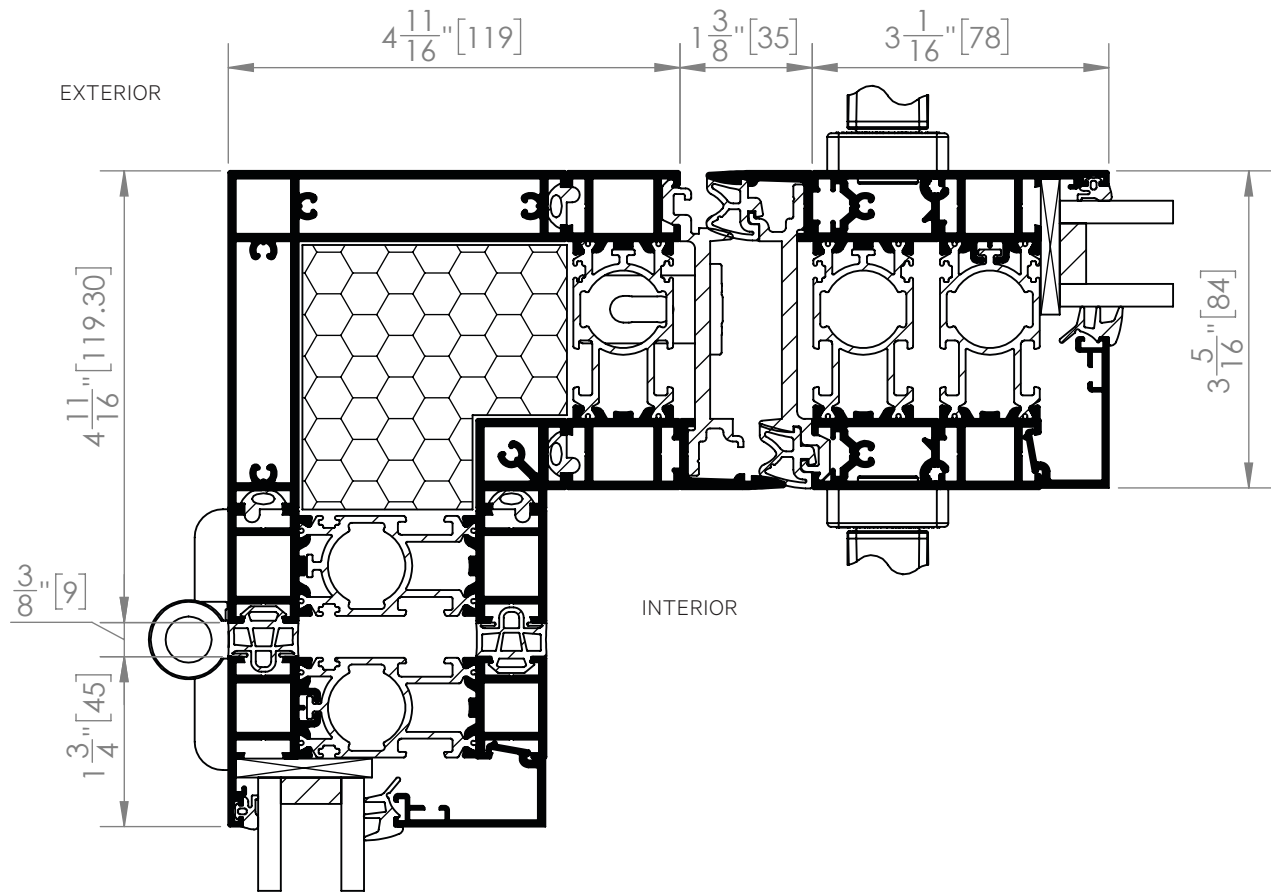

**Detail 35.1**

Meeting of Swing Panel with Locking and Folding Panel with a Combined Running Post with Top and Bottom Rollers and a 90-Degree Corner Post Attached with Concealed Edge Lock for an Outside Corner

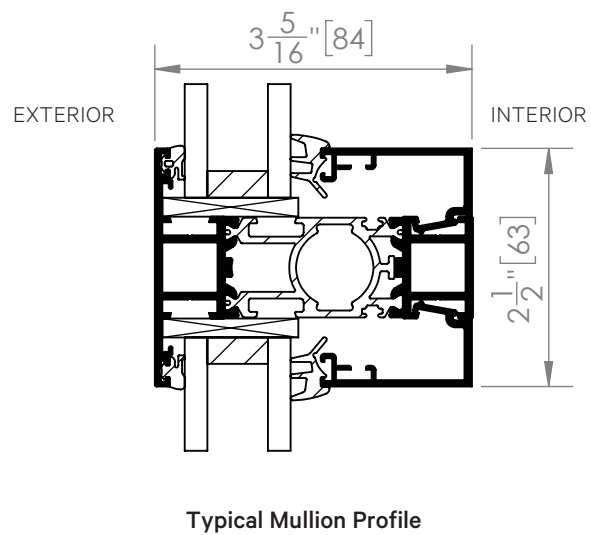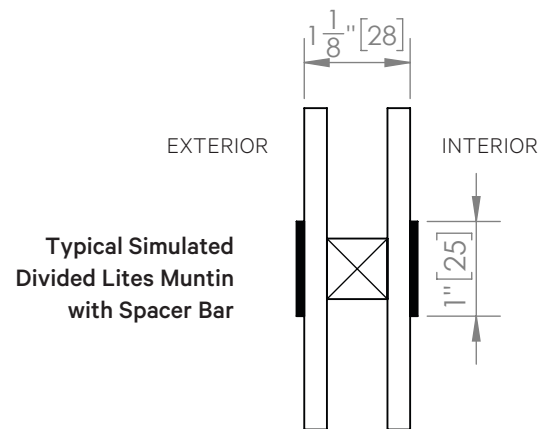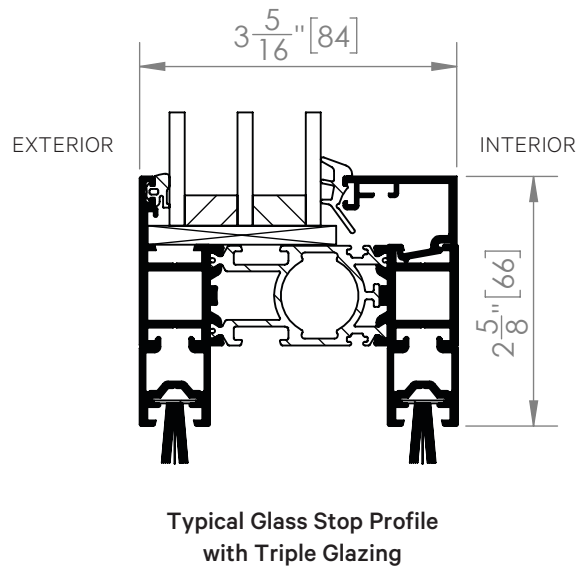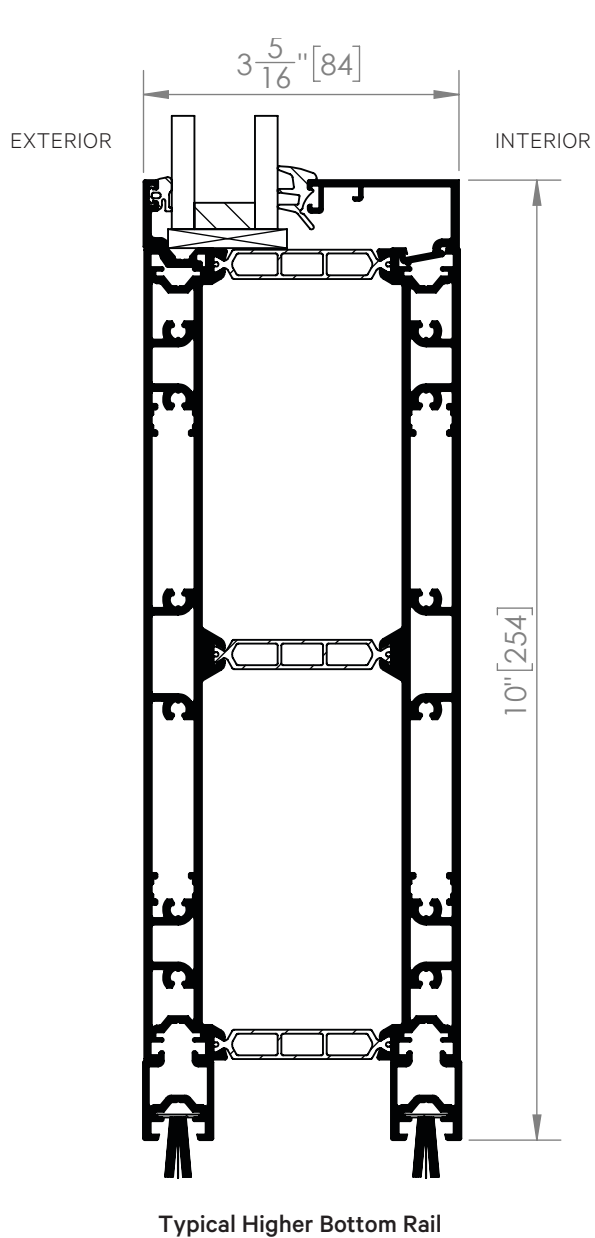

Suggested Typical Installation

INSTALLATION NOTES

Suggested Typical Installation drawings shown are very general and may not be suitable for any particular installation. Product placement, fasteners, flashing, waterproofing, sealant, trim, and other details for specific surrounding conditions must be properly designed and provided by others.



INSTALLATION CONSIDERATIONS

The approximate weight of a panel with double-glazing is 5.5-7.5 lbs/ft<sup>2</sup> (27-37 kg/m<sup>2</sup>), and with triple glazing is 7-8 lbs/ft<sup>2</sup> (34-39 kg/m<sup>2</sup>). The vertical structural deflection of the header should be the lesser of L/720 of the span and ¼" (6 mm) under full loads. Although for Floor Supported systems, there is no vertical load on the header from the panels, structural support for lateral loads (both windload and when the panels are stacked open) must be provided. See "Pre-Installation Preparation and Installation Guidelines" in the General Introduction. An owner's manual with installation instructions is available upon request.


It is recommended that all building dead loads be applied to the header prior to installing the NanaWall. If so and if a reasonable amount of time has been allowed for the effect of this dead load on the header, then only the building's live load can be used to meet the above requirements of L/720 or ¼" (6 mm). If not, both the dead and live loads need to be considered. For the Floor Supported NW Aluminum 840, please note that there is no vertical load on the header.

Note: For some jurisdictions, any standing water in sill channels must be drained. Weep holes for this purpose are to be done by others in the field, including drain connections if sill is recessed.

## Inward Opening Details

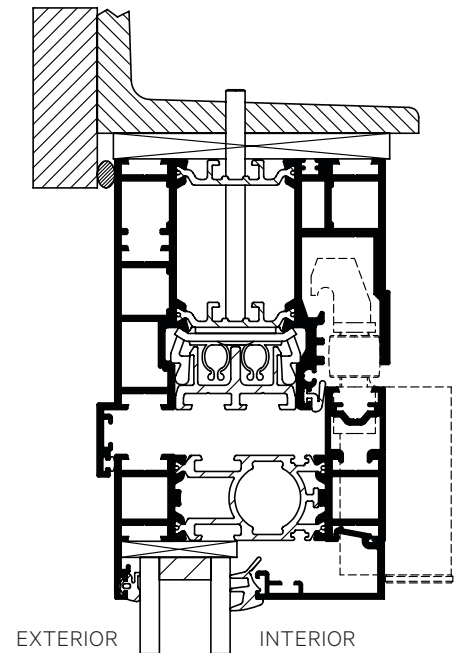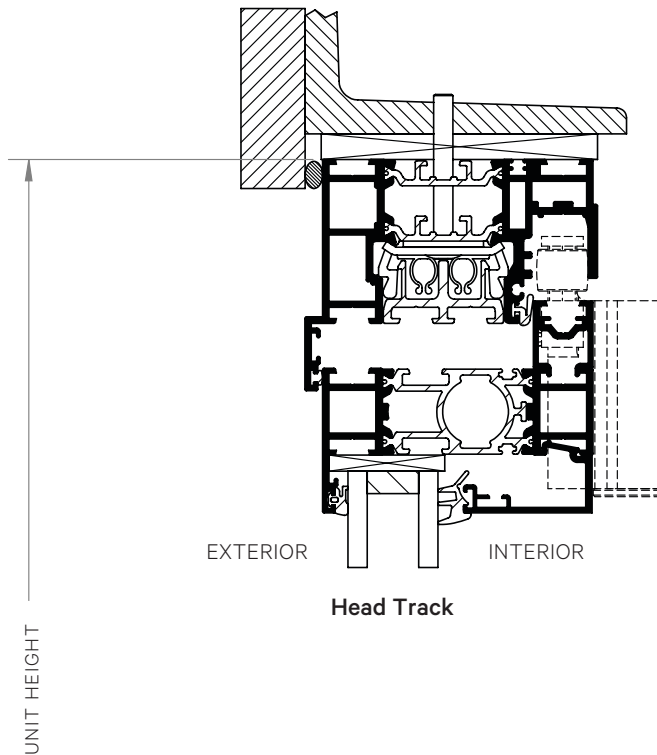



Head Track for Left/Right FourFold and SixFold Panel Sets

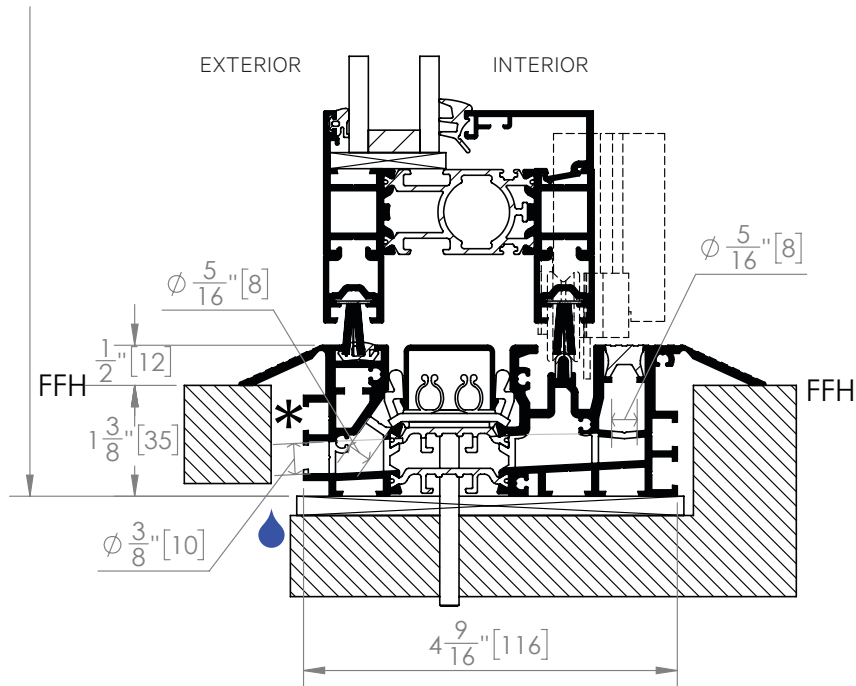


## Low Profile Saddle Sill - Option 1

(\*Weep holes have to be unobstructed. Drainage by others is necessary for water rating. Please see detail drawing available from NanaWall for weep hole sizes, pattern, and spacing.)

## Inward Opening Details

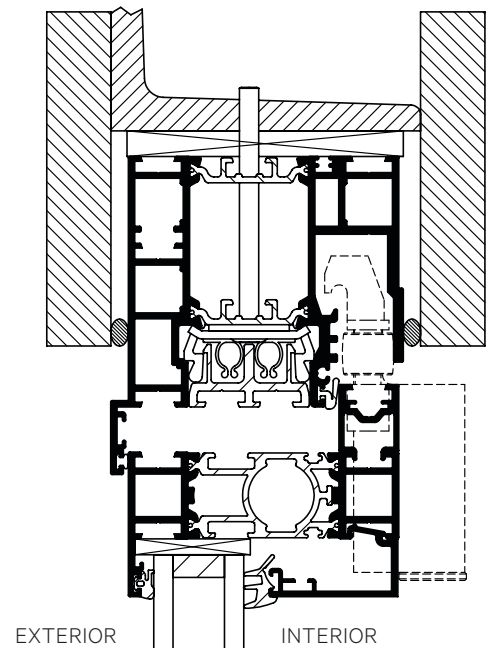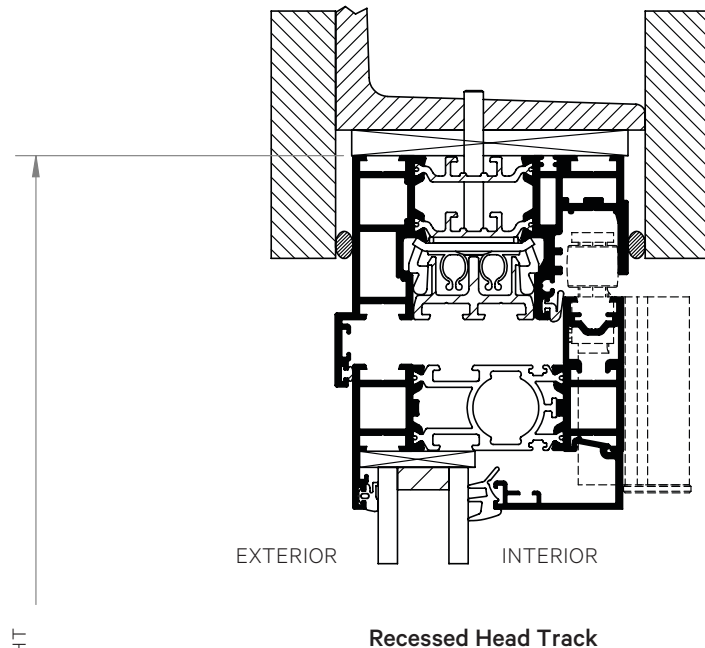


Recessed Head Track for Left/Right  
FourFold and SixFold Panel Sets

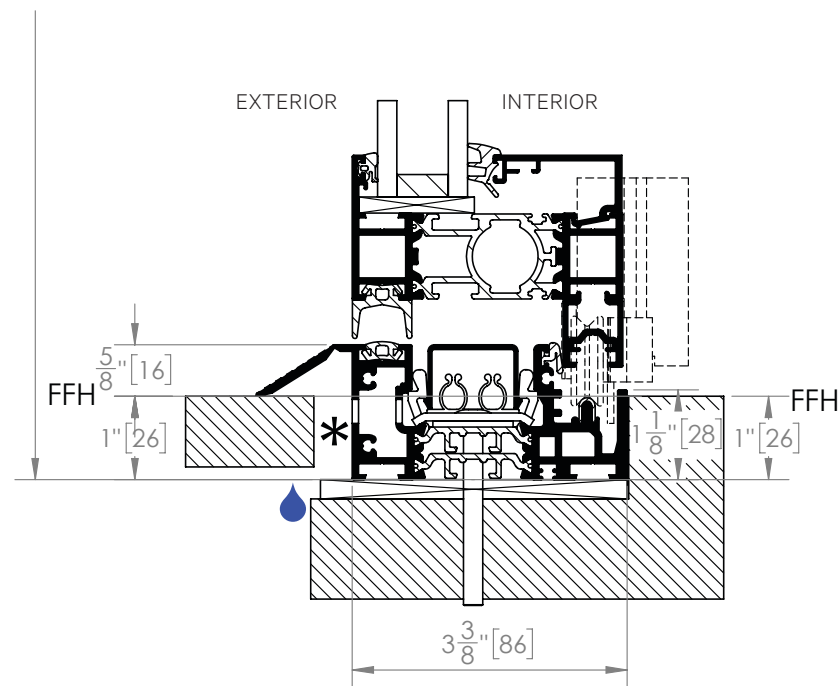


### Hybrid Sill

(\*Weep slots have to be unobstructed. Details of the management of water exiting the weep slots must be designed and installed by others. If required to drain sill cavities completely, drill one additional 5/16" (8 mm) diameter weep hole on the front face of the sill 3/8" (10 mm) from the bottom.)

## Inward Opening Details

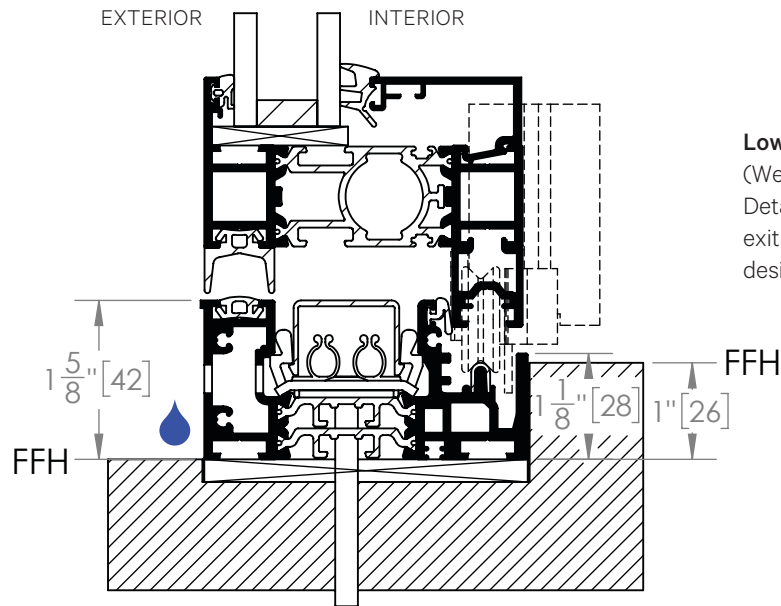


**Flush Sill**  
(No water rating.)


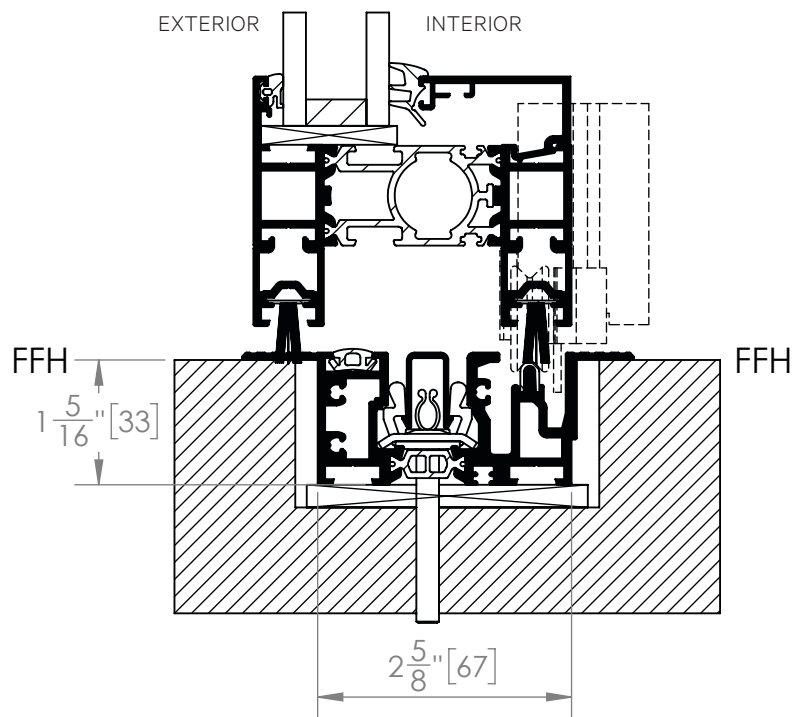


Inward Opening Details

Low Profile Saddle Sill - Option 2  
(If no water rating needed.)

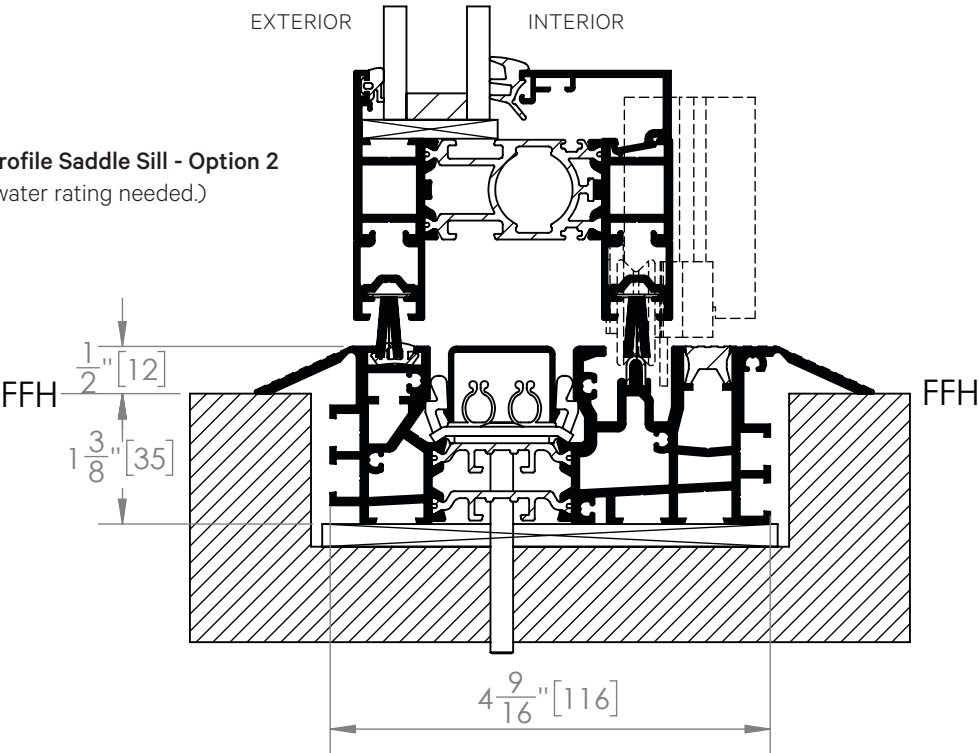


## Inward Opening Details


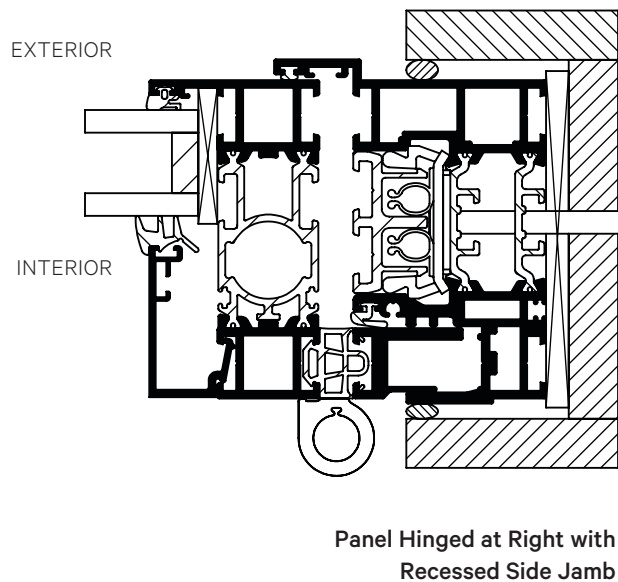
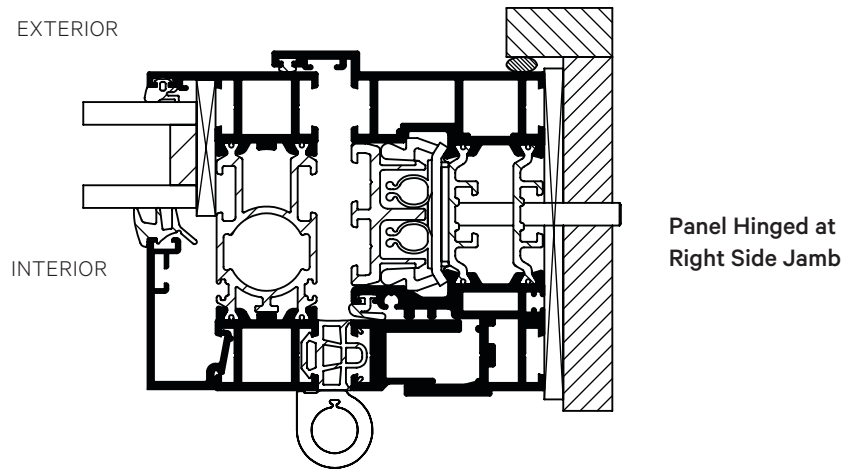




## Outward Opening Details

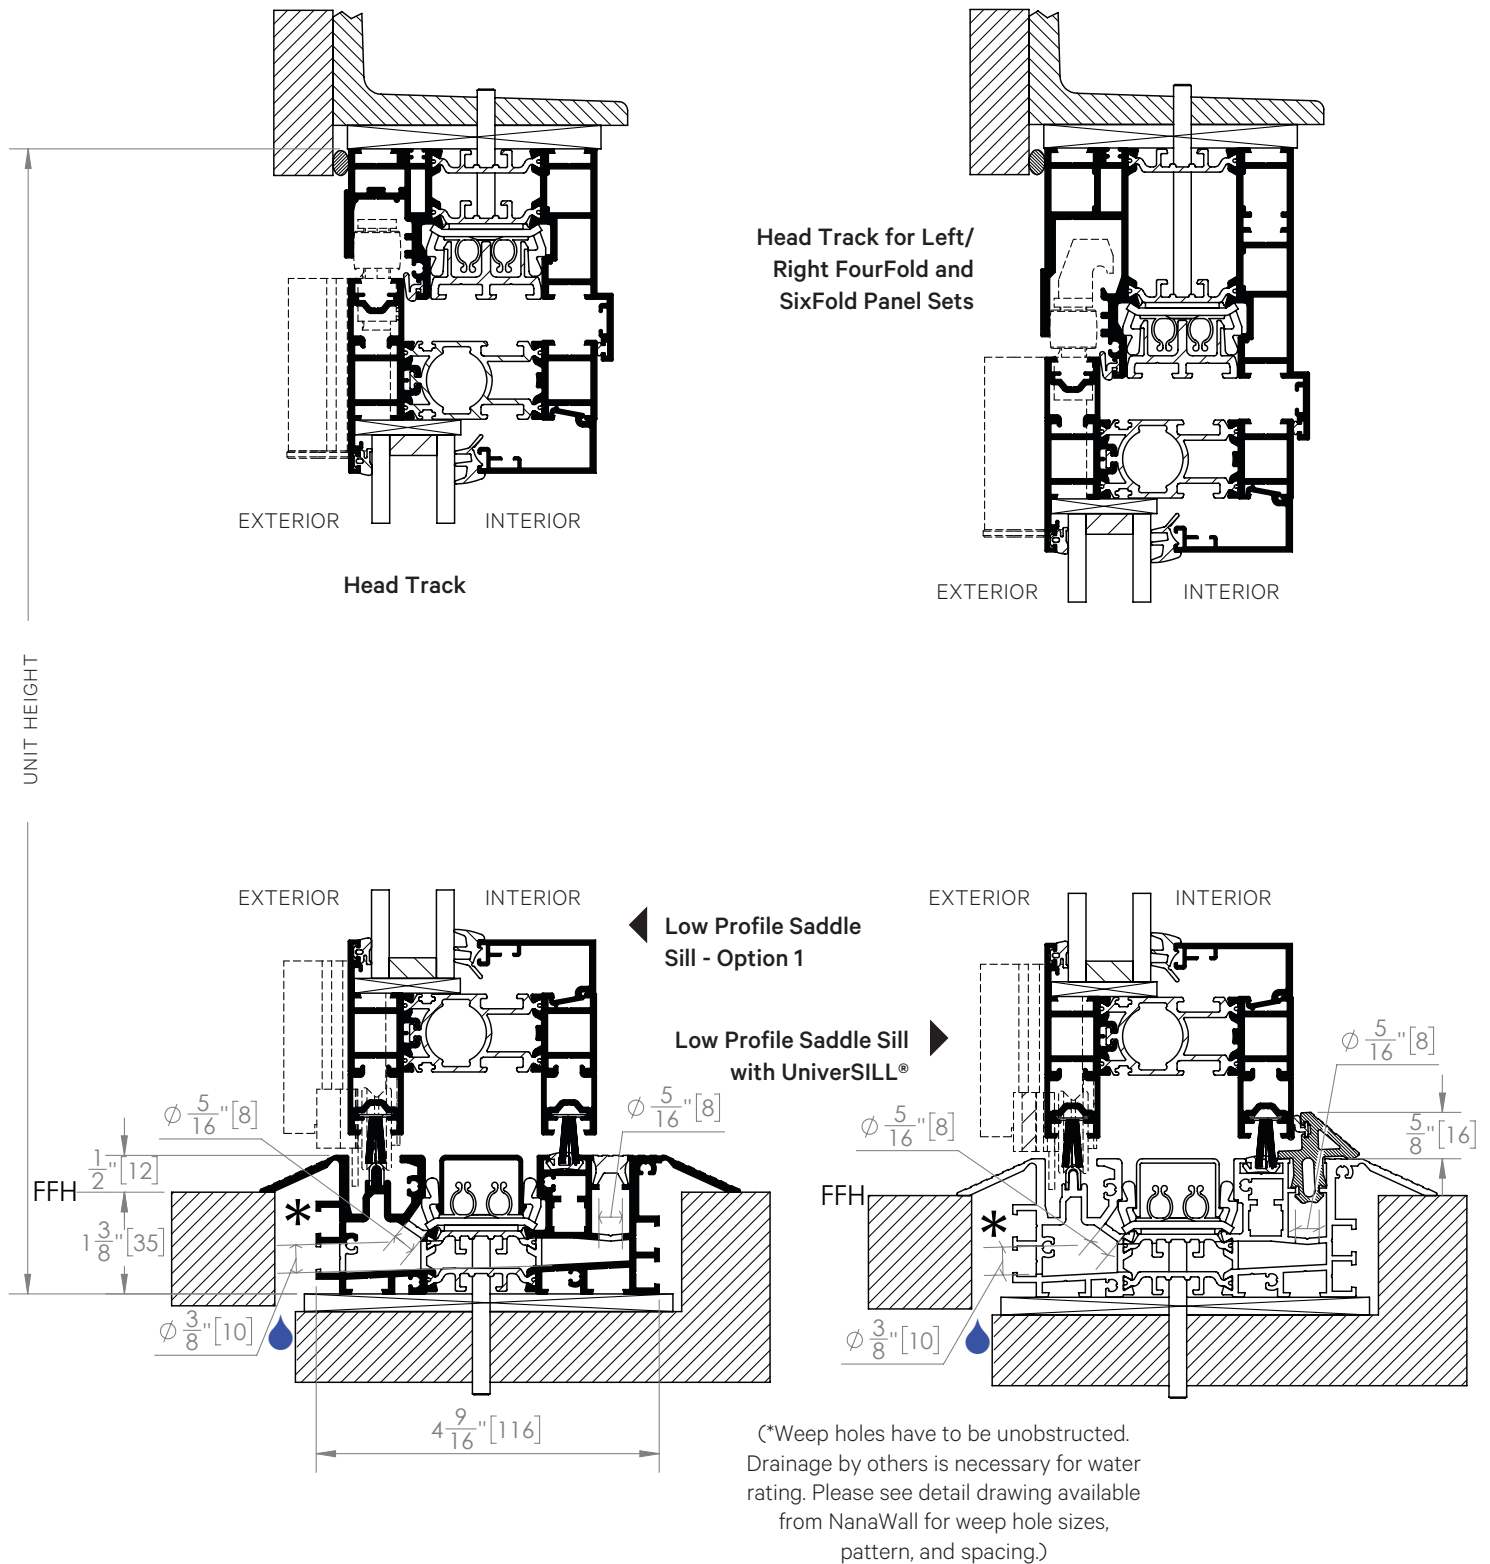

## Outward Opening Details

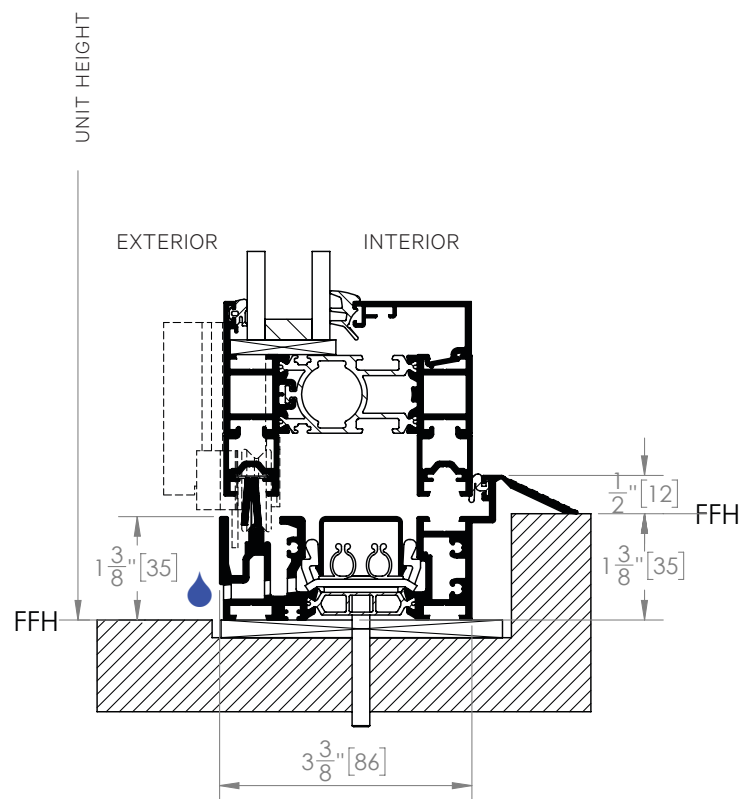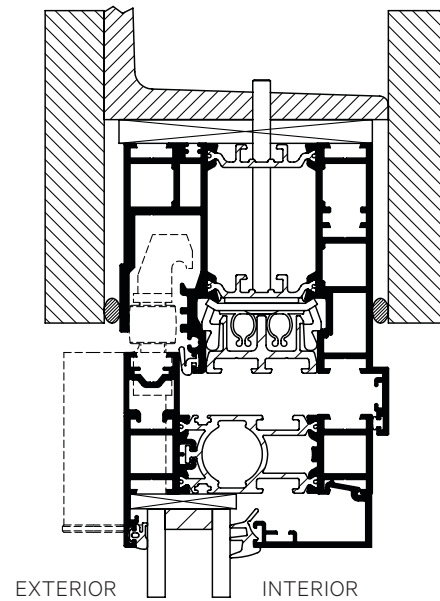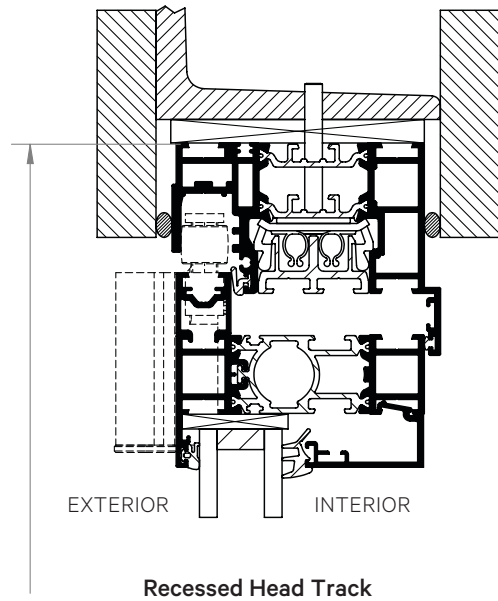


### Recessed Head Track for Left/Right FourFold and SixFold Panel Sets


## Hybrid Sill

(Weep slots have to be unobstructed. Details of the management of water exiting the weep slots must be designed and installed by others.)

### Outward Opening Details

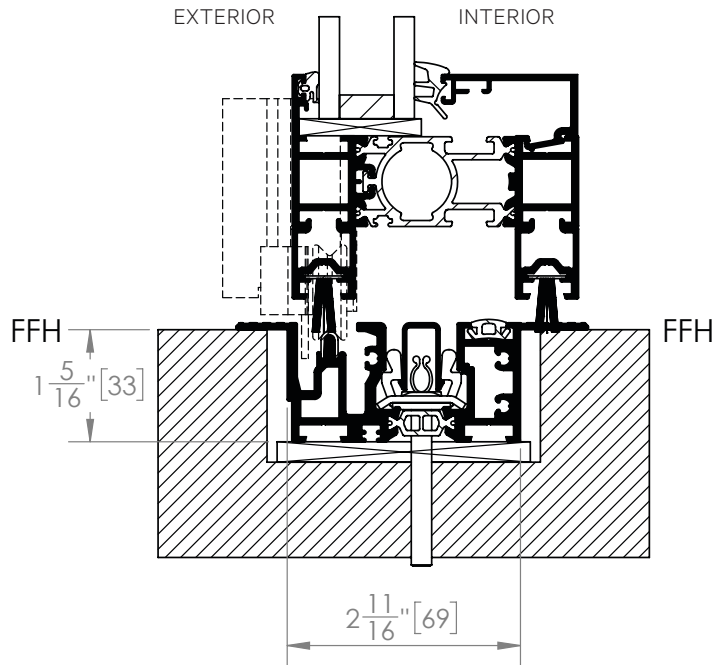


**Flush Sill**  
(No water rating.)

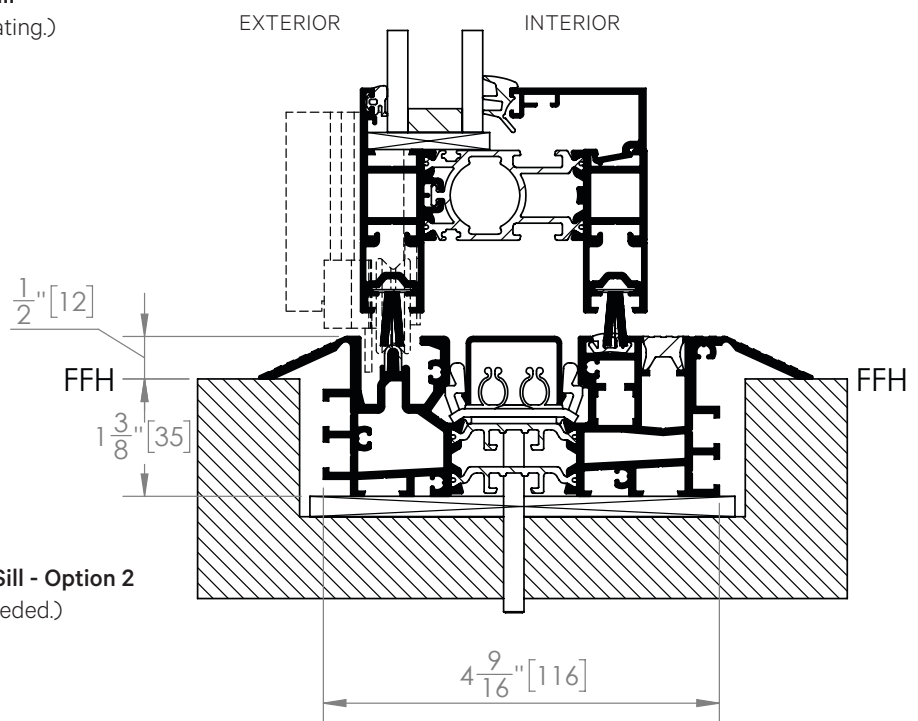


**Low Profile Saddle Sill - Option 2**  
(If no water rating needed.)

## Outward Opening Details

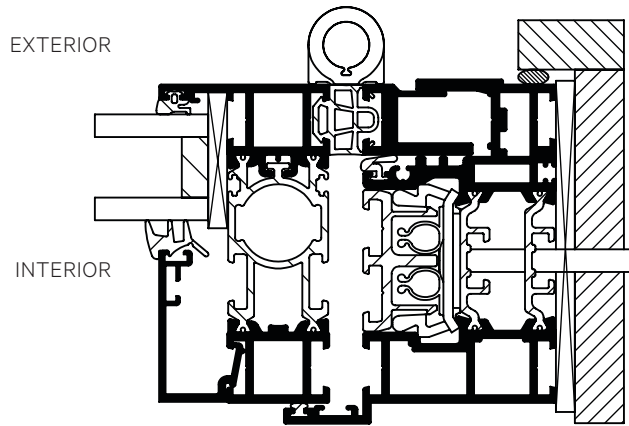

Panel Hinged at  
Right Side Jamb

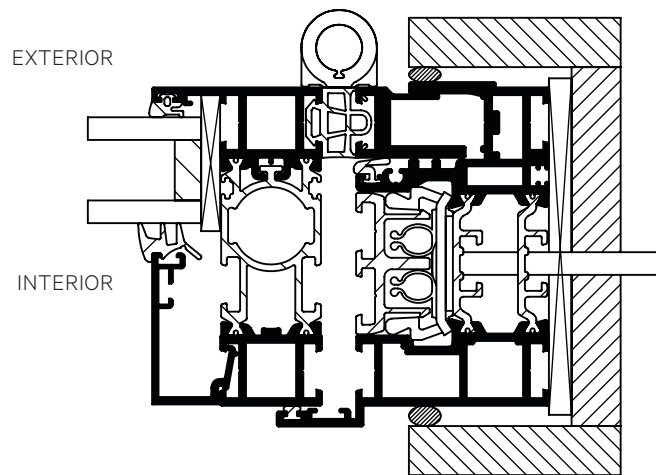

Panel Hinged at Right  
with Recessed Side Jamb